



- Current Rating: 1 Amp
- Insulation Resistance: 500M $\Omega$ /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m $\Omega$  Max
- Temperature Range: -25°C ~ +85°C

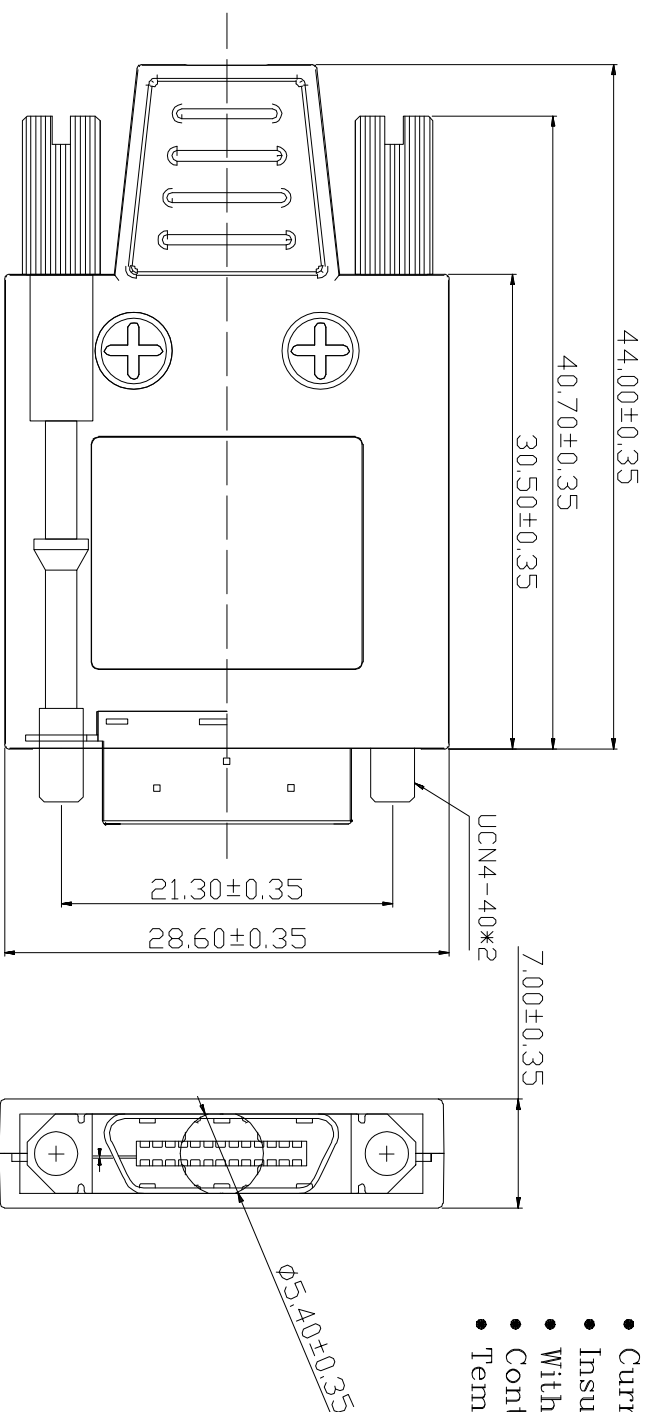

6	JACKSCREWS	STEEL	PLATING:NI	
5	CABLE CLIPPER	STEEL	PLATING:NI	
4	BACK SHELL	ZINC ALLOY	PLATING:NI	
3	HOUSING	LCP+30%GF COLOR:BEIGE	PLATING:NI	
2	SHELL	SPCC	PLATING:NI	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA:G/F SOLDER AREA:Sn UNDER-PLATING:NI	

QUALITY SYMBOLS

□: CRITICAL

☒: MAJOR

▽: ZERO DEFECT

S.P.C

Tolerance

x: ±0.50

.x: ±0.30

.xx: ±0.25

NAME: CISCO 26P PITCH 1.0mm MALE SOLDER ASSEMBLY

REV: B

SCALE: N:1

DATE: 2014/09/23

PART NO. B06-0263C1A9-02

CHK BY KING ZHOU

APP BY

DRAWING NO. B06-013

东莞市箐国电子有限公司

DATE: 2014/09/23

DESCRIPTION: NEW ISSUE

修正电气参数

JACK CHEN

JACK CHEN

APPROVER

8

7

6

5

4

3

2

1