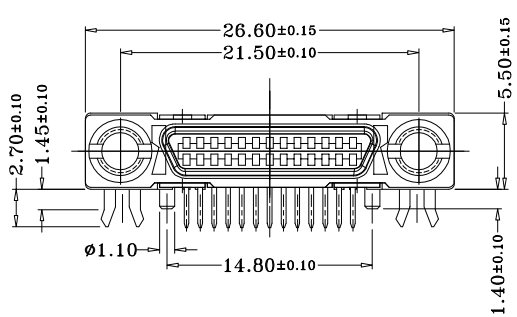



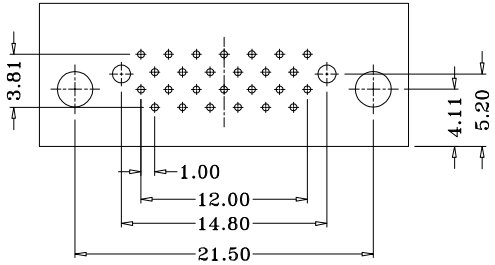

P. C. B. LAYOUT

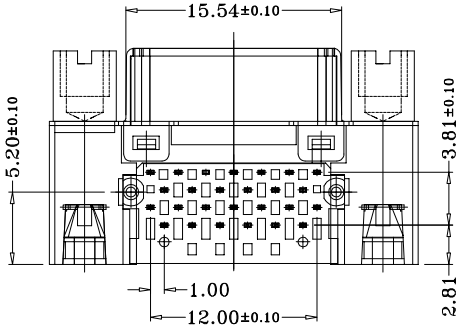



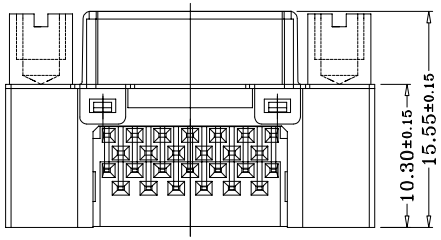

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: −25°C ~ +85°C

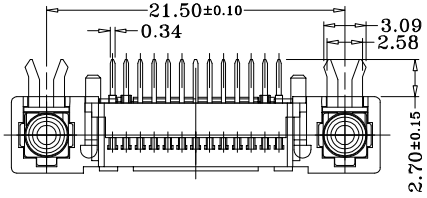

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
7	SCREW	COPPER ALLOY	PLATING:Ni	
6	BOARDLOCK	COPPER ALLOY	PLATING:Tin	
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	LCP+30%GF	COLOR:BEIGE	
3	HOUSING	LCP+30%GF	COLOR:BEIGE	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
A	2005/06/08	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance
x. ±0.50
.x ±0.30
.xx ±0.25

NAME:	CISCO(1.0mm)26P FEMALE R/A DIP Type				PART NO.	B06-0266C1ED-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2005/06/08	JINGLI	KING ZHOU		B06-006

东莞市箐国电子有限公司