
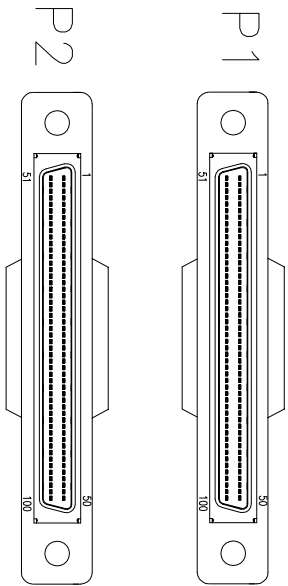


ROHS

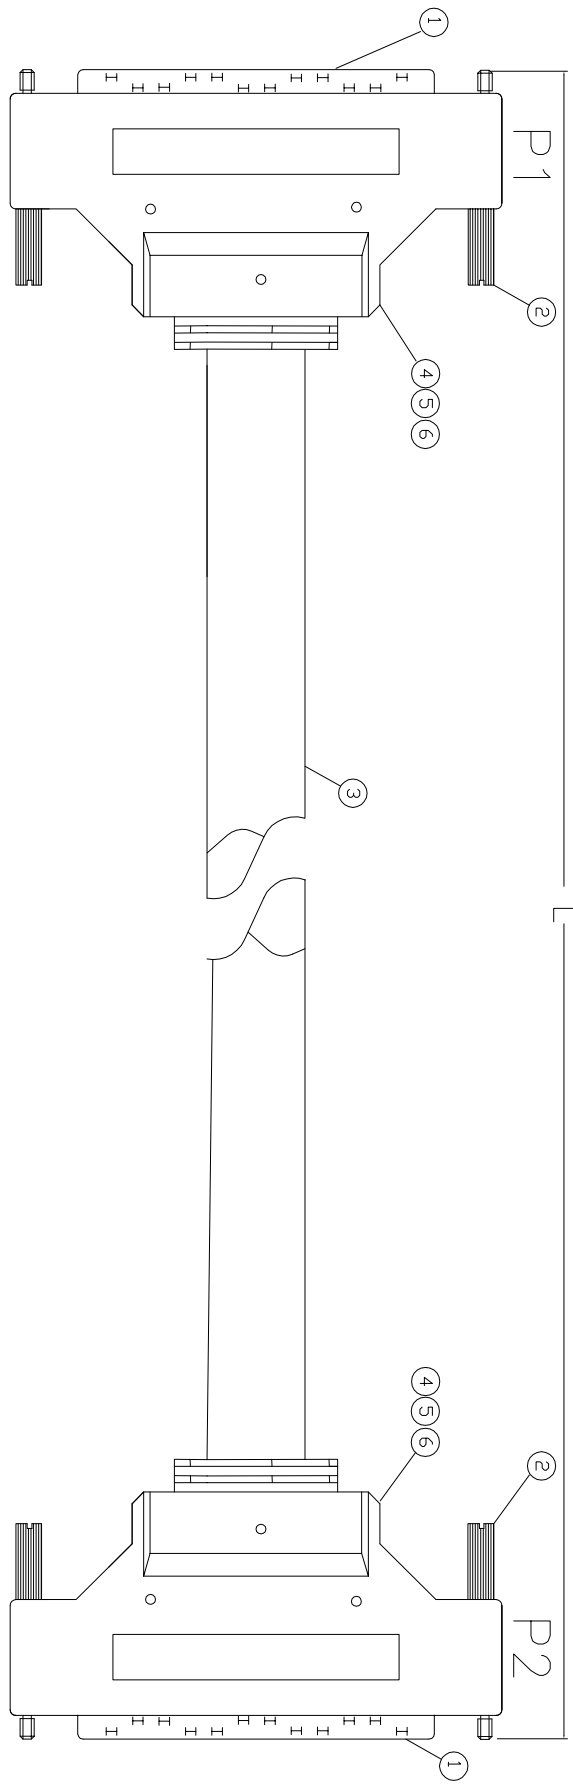

PIN ASSIGNMENT

Part NO	LENGTH	REMARK
1 FC-DB100-01B	L=500MM	±15MM
2 FC-DB100-02B	L=1000MM	±30MM
3 FC-DB100-03B	L=2000MM	±35MM
4 FC-DB100-04B	L=3000MM	±50MM
5 FC-DB100-05B	L=5000MM	±80MM

P1	SIGNAL	P2
1	2	1
2	3	2
3	4	3
4	5	4
5~98	6	5~98
99	7	99
100	8	100
Shell	9	Shell

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QTY
6	COPPER FOIL	COPPER FOIL W=25MM	NA
5	DYERMOULD	50P PVC COLDR BLACK	NA
4	MOULD	PE	NA
3	CABLE	UL20276 28AWG*50P+AL+BRAID PVC JACKET COLOR:BLACK OD= 11.0mm	1PCS
2	SCREW	SCREW M2.6 NIK4#38MM #2-56UNC BK	4PCS
1	CONNECTOR	HPDB SCSI 100Pin Male SOLDER MULDING TYPE	2PCS

<p>QUALITY SYMBOLS</p> <p>■ : CRITICAL</p> <p>□ : MAJOR</p>		<p>UNIT: mm</p> <p>SCALE: 2:1</p> <p>TOLERANCES: DIM. ±0.10</p> <p>ANGLE: ±1°</p>
<p>APPROVED</p> <p>CHECKED</p> <p>DESIGN</p> <p>DRAWN</p>		<p>PART NO.</p> <p>FC-DB100-0XB</p>
<p>DESCRIPTION</p> <p>SCSI DB 100P CABLE</p>		<p>SHT</p> <p>1/1</p>
<p>DRAWING NO.</p> <p>LC-SC100D</p>		<p>REV</p> <p>A</p>

东莞市箐国电子有限公司

2022-03-28

DATE

DESCRIPTION

REV

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.