

See TABLE A


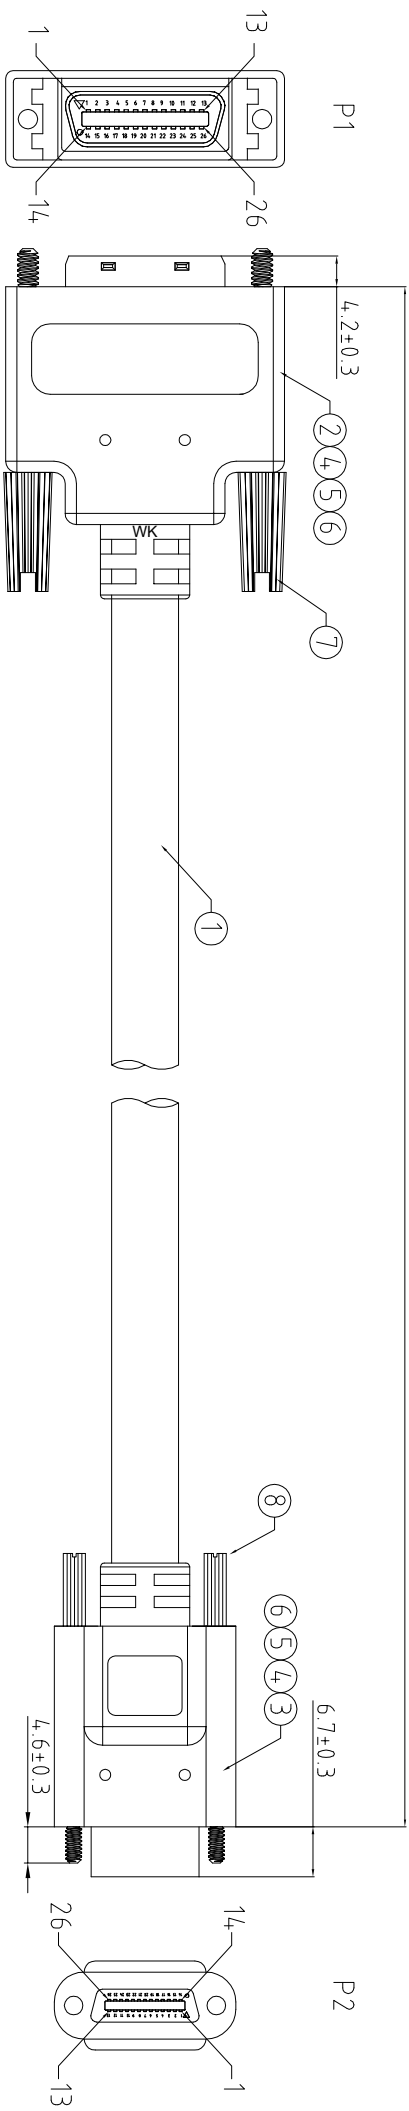


TABLE A

POTEC P/N:	CUSTOMERS P/N:	LENGTH	RESISTANCE
WAK-S002-01A		1000±50	2.0Ω
WAK-S002-02A		3000±50	3.0Ω

Wire Assignment:

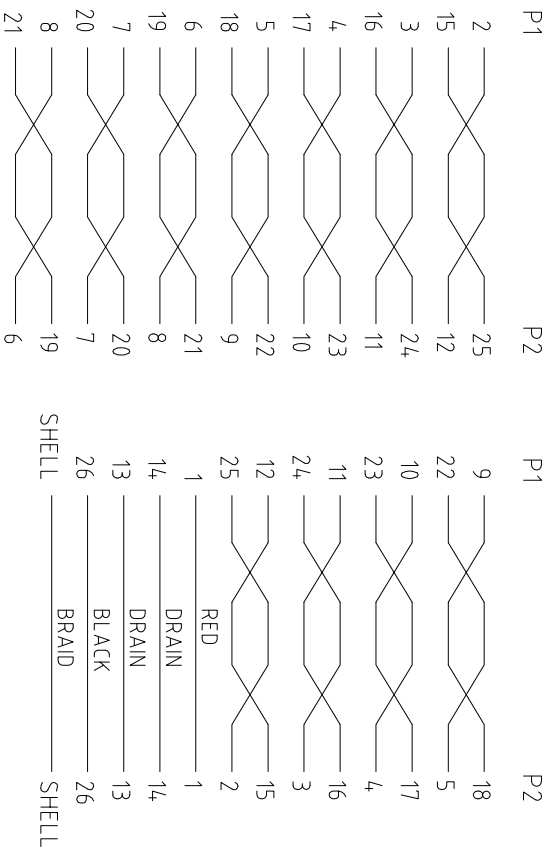

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+ALU X1P+24AWG×2C+D×2C+AB OD:9.0MM) Jacket:Black PVC	See TABLE A	mm
②	CONN	MDR 26P Male PIN:5U" Insulation:Black Shell:NI	1	PCS
③	CONN	SDR 26P Male PIN:30U" Insulation:Black Shell:NI	1	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM
⑦	Screw	#4-4.0 Thumbscrew L=4.4MM	2	PCS
⑧	Screw	M2.0 Thumbscrew L=4.05MM	2	PCS

REMARK:  
 <1>. THE PRODUCT IS "ROHS COMPLIANT".  
 <2>. THE MARK "□" IS QC CHECK DIMENSIONS.

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100% TEST
2. DIELECTRIC WITHSTAND:AC100V/1MIN.
3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)
4. CONDUCTIVE RESISTANCE:See TABLE A

REV	ECN NO	DESCRIPTION	APPD.	DATE	SHEET:	OF	REV:
					1	1	A

Tolerance:	X. ±	Approved by:	LIAO
	.X ±	Checked by:	TENG
	.XX ± 0.3	Engineer by:	Jime
	.XXX ±	Drawn by:	Dreawn
Angle:	X° ±	Date:	08/08/2016
	.X° ±	Scaler:	mm

Customer P/N:	WAK-S002-01A
Customer P/N:	WAK-S002-02A
Customer P/N:	WAK-S002-03A
Customer P/N:	WAK-S002-04A
Customer P/N:	WAK-S002-05A
Customer P/N:	WAK-S002-06A
Customer P/N:	WAK-S002-07A
Customer P/N:	WAK-S002-08A
Customer P/N:	WAK-S002-09A
Customer P/N:	WAK-S002-10A
Customer P/N:	WAK-S002-11A
Customer P/N:	WAK-S002-12A
Customer P/N:	WAK-S002-13A
Customer P/N:	WAK-S002-14A
Customer P/N:	WAK-S002-15A
Customer P/N:	WAK-S002-16A
Customer P/N:	WAK-S002-17A
Customer P/N:	WAK-S002-18A
Customer P/N:	WAK-S002-19A
Customer P/N:	WAK-S002-20A
Customer P/N:	WAK-S002-21A
Customer P/N:	WAK-S002-22A
Customer P/N:	WAK-S002-23A
Customer P/N:	WAK-S002-24A
Customer P/N:	WAK-S002-25A
Customer P/N:	WAK-S002-26A

Company:	东莞市誉国电子有限公司
Product:	MDR TO SDR CABLE
DWG. NO.:	