
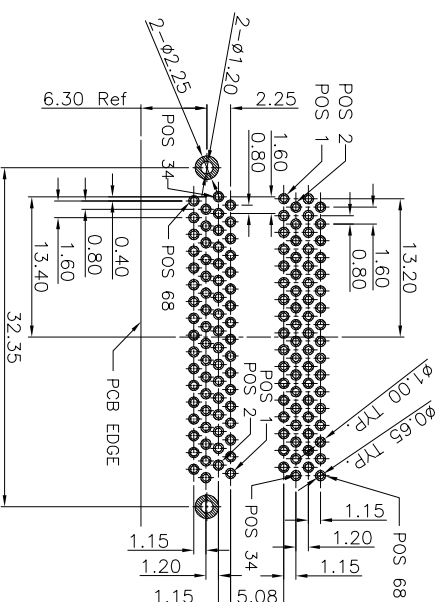




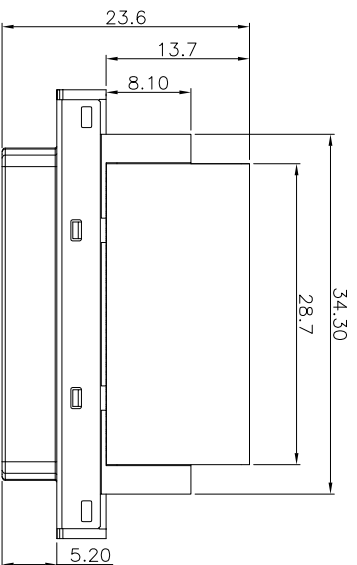


MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0) RATED.
2. COVER : THERMOPLASTIC (UL 94V-0) RATED.
3. TERMINAL : COPPER ALLOY,
PLATING : GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
4. HARPOON : COPPER ALLOY,
PLATING : TIN PLATED OVERALL.
4. SHELL : SPCG,
PLATING : NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING : 0.3 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : >500MΩ MIN.
4. OPERATING TEMPERATURE : -25°C TO +85°C.

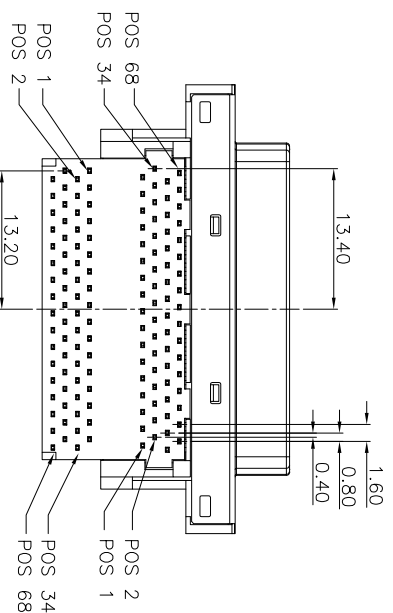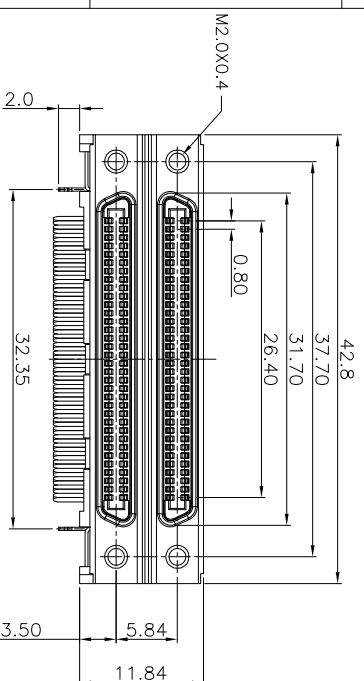

4	COVER	THERMOPLASTIC	COLOR: BLACK	
3	HOUSING	THERMOPLASTIC	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

A				QUALITY SYMBOLS		Tolerance		NAME: VHDCl 68P FEMALE DOUBLE RIGHT ANGLE (客户用图)		PART NO.	B06-068611AA-02		
				☐ : ☒ :		X. .X .xx	±0.80 ±0.50 ±0.25	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO
				CRITICAL	MAJOR			SCALE: N:1	DATE: 2017/01/16	DAWN HU	KING ZHOU		B06-004
		2017/01/16新版发行	King Zhou										
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C			东莞市箐国电子有限公司					

东莞市箐国电子有限公司