
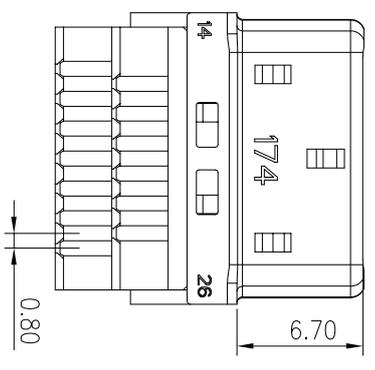


3D VIEW

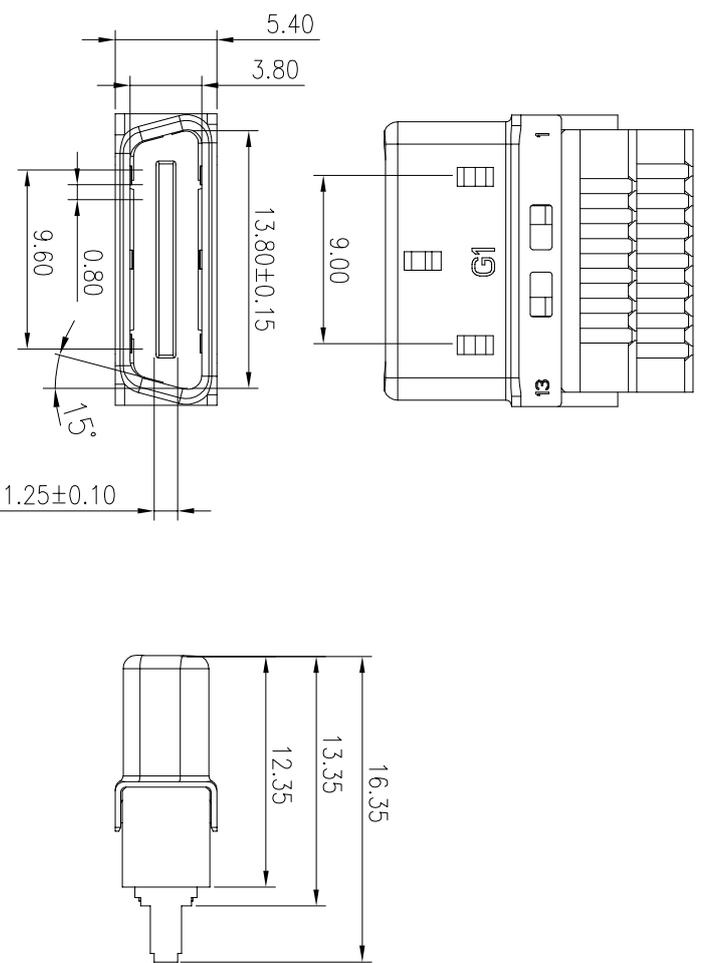

Voltage Current Rating: 0.3 AMP.  
 Dielectric Withstanding Voltage: 250V AC  
 Contact Resistance: 100 mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Temperature Range: -20°C to +85°C

E	LONG CONTACT	13	C2680-EH T=0.30mm	SOLD FLASH AU3U* ON CONTACT AREA 100U*IN PLATING ON SOLDER TAILS. 800*ML OVER NICKEL PLATING.
D	SHORT CONTACT	13		
C	SHELL	1	SPCC T=0.30mm	Ni: 80u*Min
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	LCP+15%GF UL94-V0	BLACK
NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR

QUALITY SYMBOLS

□: MAJOR  
 ⊠: CRITICAL

△: S.P.C  
 ▽: ZERO DEFECT

Tolerance

x. ±0.80  
 .x ±0.50  
 .xx ±0.30



NAME: SDR-26P Male Solder Connector PART NO. B06-02611AA-01

REV: A UNIT: mm DRW BY CHK BY APP BY DRAWING NO. B01-009

SCALE: N:1 DATE: 2018/01/09 JING LI JACK CHEN

APPROVER: JACK CHEN

8	7	6	5	4	3	2	1
F	E	D	C	B	A		
<p>DESCRIPTION: SDR-26P Male Solder Connector</p> <p>DATE: 2018/01/09 新版发行</p> <p>SIDE: 8</p>							
<p>APPROVER: JACK CHEN</p>							
<p>DESCRIPTION: SDR-26P Male Solder Connector</p>							
<p>DATE: 2018/01/09 新版发行</p>							
<p>SIDE: 8</p>							

东莞市箐国电子有限公司