









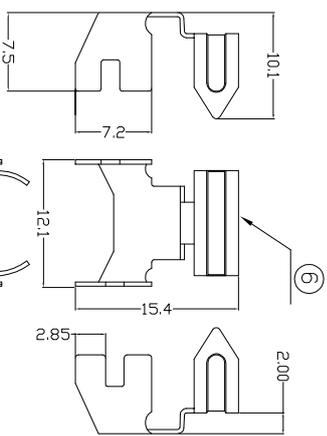
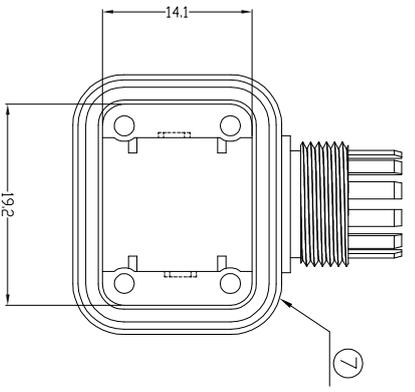
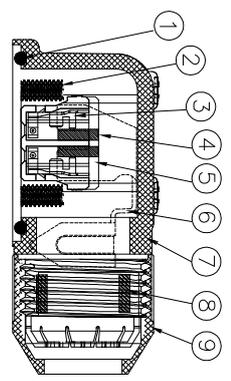
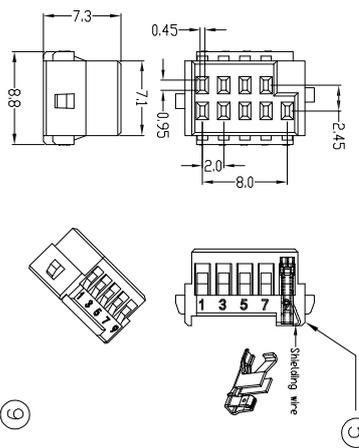



ROHS COMPLIANT



ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
9	GLAND NUT	SYNTHETIC RESIN	COLOR:BLACK	1PCS
8	BUSHING	SYNTHETIC RESIN	COLOR:BLACK	1PCS
7	HOOD	SYNTHETIC RESIN	COLOR:BLACK	1PCS
6	SHELL	SPPC	PLATING:NI	1PCS
5	SOCKET INSULATOR	SYNTHETIC RESIN	COLOR:BLACK	1PCS
4	CARD	SYNTHETIC RESIN	COLOR:BLUE	2PCS
3	TERMINAL	COPPER ALLOY	PLATING:G/F	8PCS
2	SCREW	STEEL	PLATING:NI	4PCS
1	GASKET	SYNTHETIC RUBBER	COLOR:BLACK	1PCS

Voltage Current Rating:5 AMP.
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:30 mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-20℃ to +85℃

QUALITY SYMBOLS

□ : MAJOR
 △ : CRITICAL
 ▽ : S.P.C

Tolerance

X : ±0.80
 .X : ±0.50
 .XX : ±0.25

NAME: J3/J4 9P Waterproof Endcode Plug Connector

REV: A
 UNIT: mm
 SCALE: N:1

PART NO. B01-00911154-01

DRW BY: KING ZHOU
 CHK BY: KING ZHOU
 APP BY: KING ZHOU

PART REMARKS

DRAWING NO. B01-029

DATE: 2019/10/09
 新版发行

APPROVER: King Zhou

DESCRIPTION

APPROVER

ZERO DEFECT S.P.C



东莞市箜国电子有限公司

8

7

6

5

4

3

2

1