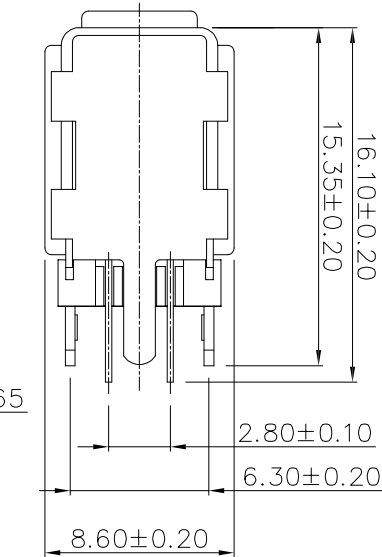
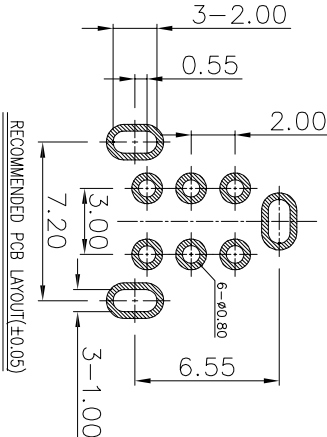
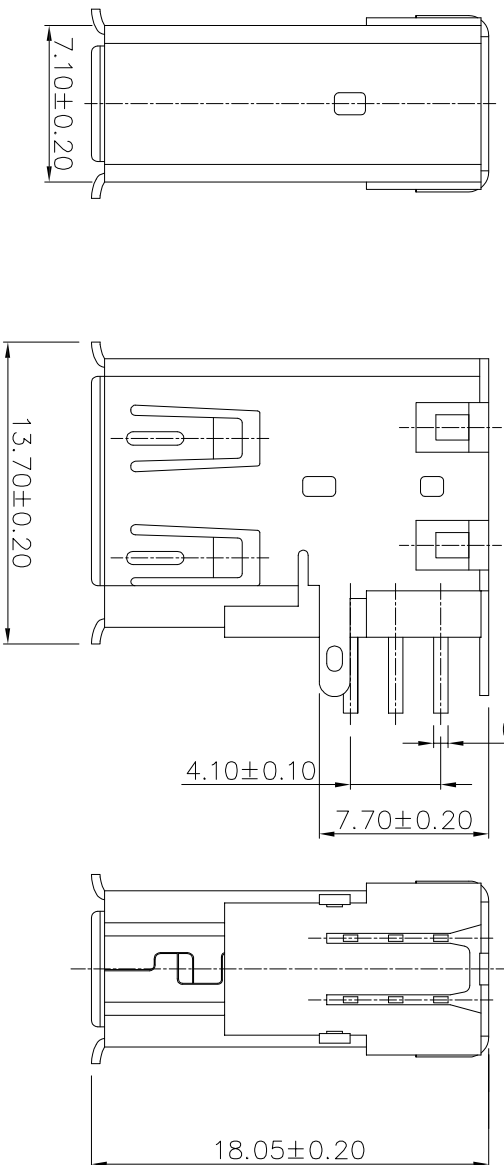
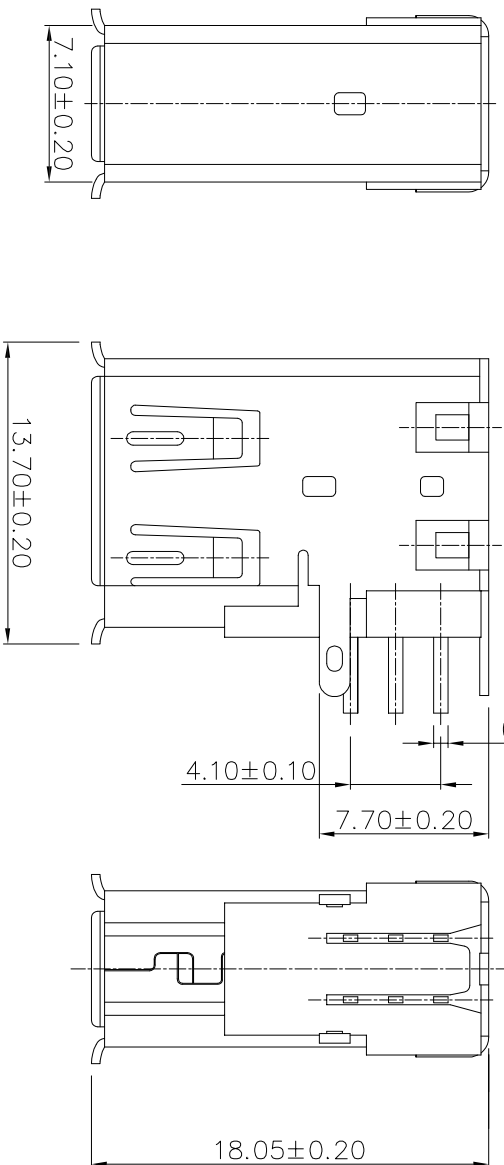


8		7	6	5	4	3	2	1																																												
					 RECOMMENDED PCB LAYOUT(±0.05)																																															
					Voltage Current Rating:1.5 AMP.40V AC Dielectric Withstanding Voltage:500V AC Contact Resistance:30 mΩ Max. Insulation Resistance:100MΩ Min. Temperature Range:-25℃ to +85℃																																															
																																																				
<table><tr><th>ITEM</th><th>DESC.</th><th>MATERIAL</th><th>REMARKS</th><th>PART REMARKS</th></tr><tr><td>4</td><td>COVER</td><td>STAINLESS STEEL</td><td></td><td></td></tr><tr><td>3</td><td>SHELL</td><td>COPPER ALLOY</td><td>OVER-PLATING: NI</td><td></td></tr><tr><td>2</td><td>HOUSING</td><td>LCP UL94V-0</td><td>COLOR: BLACK</td><td></td></tr><tr><td>1</td><td>CONTACT</td><td>COPPER ALLOY</td><td>CONTACT AREA:G/F SOLDER AREA:G/F UNDER-PLATING:NI</td><td></td></tr></table>					ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS	4	COVER	STAINLESS STEEL			3	SHELL	COPPER ALLOY	OVER-PLATING: NI		2	HOUSING	LCP UL94V-0	COLOR: BLACK		1	CONTACT	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:G/F UNDER-PLATING:NI																								
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS																																																
4	COVER	STAINLESS STEEL																																																		
3	SHELL	COPPER ALLOY	OVER-PLATING: NI																																																	
2	HOUSING	LCP UL94V-0	COLOR: BLACK																																																	
1	CONTACT	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:G/F UNDER-PLATING:NI																																																	
<table><tr><th colspan="2">QUALITY SYMBOLS</th><th colspan="2">Tolerance</th><th>NAME:</th><th>IEEE 1394-6P Female R/A DIP Type</th><th>PART NO.</th><th>B19-006A13AN-01</th></tr><tr><td>□:</td><td>✕:</td><td>x.</td><td>±0.50</td><td>REV:</td><td>B</td><td>UNIT:</td><td>mm</td><td>DRW BY</td><td>CHK BY</td><td>APP BY</td><td>DRAWING NO.</td></tr><tr><td>CRITICAL</td><td>MAJOR</td><td>.x</td><td>±0.30</td><td>SCALE:</td><td>NONE</td><td>DATE:</td><td>2011/07/02</td><td>JING LI</td><td>JACK CHEN</td><td></td><td>B19-005</td></tr><tr><td>ZERO DEFECT</td><td>S.P.C</td><td>.xx</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>					QUALITY SYMBOLS		Tolerance		NAME:	IEEE 1394-6P Female R/A DIP Type	PART NO.	B19-006A13AN-01	□:	✕:	x.	±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	CRITICAL	MAJOR	.x	±0.30	SCALE:	NONE	DATE:	2011/07/02	JING LI	JACK CHEN		B19-005	ZERO DEFECT	S.P.C	.xx	±0.10									东莞市箐国电子有限公司			
QUALITY SYMBOLS		Tolerance		NAME:	IEEE 1394-6P Female R/A DIP Type	PART NO.	B19-006A13AN-01																																													
□:	✕:	x.	±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.																																									
CRITICAL	MAJOR	.x	±0.30	SCALE:	NONE	DATE:	2011/07/02	JING LI	JACK CHEN		B19-005																																									
ZERO DEFECT	S.P.C	.xx	±0.10																																																	
<table><tr><th>DATE</th><th>DESCRIPTION</th><th>APPROVER</th></tr><tr><td>2021/03/02</td><td>增加电气性能描述</td><td>JACK CHEN</td></tr><tr><td>2011/07/02</td><td>新版发行</td><td>JING LI</td></tr></table>					DATE	DESCRIPTION	APPROVER	2021/03/02	增加电气性能描述	JACK CHEN	2011/07/02	新版发行	JING LI																																							
DATE	DESCRIPTION	APPROVER																																																		
2021/03/02	增加电气性能描述	JACK CHEN																																																		
2011/07/02	新版发行	JING LI																																																		
8		7	6	5	4	3	2	1																																												