
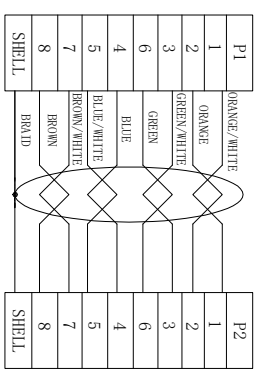


ROHS

P1

L

P2

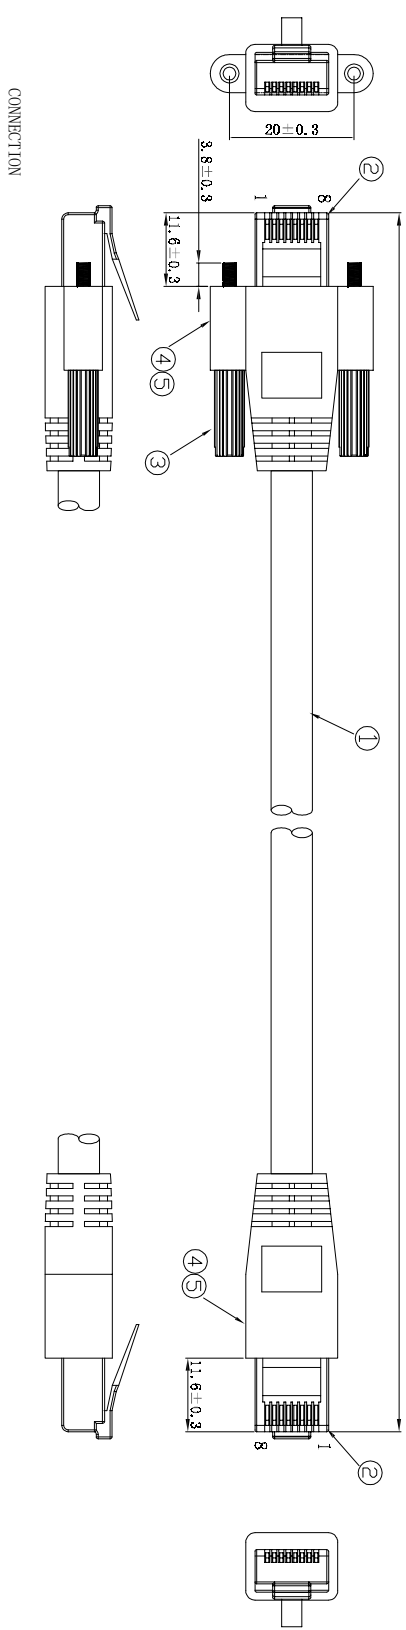

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 10M OHMS MIN, AC 500V 0.01sec.
 4. INSTANT BREAK :3 SECONDS.
 5. The dimensions must meet the surface requirements.
 6. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.
 7. Appearance of no dirt, damage, scratch, deformation and other undesirable phenomena.

NO.	PART NO	LANGTH	NOTE
1	108990100	3000 ± 50mm	EC8-GR-3M
2	108990101	5000 ± 100mm	EC8-GR-5M

ITEM	PART NAME	DESCRIPTION	PART NO.	SHT	QY'T
5	OVERMOLD	PVC 45P COLOR:BLACK	10899010X	1/1	NA
4	MOLD	LDPE,Transparent			NA
3	SCREW	M2.0*0.4 1215Green steel, Ni plating.			2PCS
2	CONN	RJ45 CONNECTOR,8P8C,WITH SHELL.			2PCS
1	CABLE	CAT. 5 4P*24AWG,DD6.5 高柔铠装电缆			NA

QUALITY SYMBOLS		UNIT	SCALE	TOLERANCES	DESCRIPTION	
■ :	CRITICAL	mm	2:1	DIM. ±0.10	DESCRIPTION	工业相机网线EC8-GR-3M(螺丝固定型)
⊗ :	MAJOR			ANGLE: ±1°	DRAWING NO.	
∇ :	ZERO DEFECT				REV	A
∇ :	S.P.C				REV	A
FIRST ISSUE		2018-11-21		DATE		
DESCRIPTION						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LINCONN INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

东莞市箐国电子有限公司