


ROHS

客户:

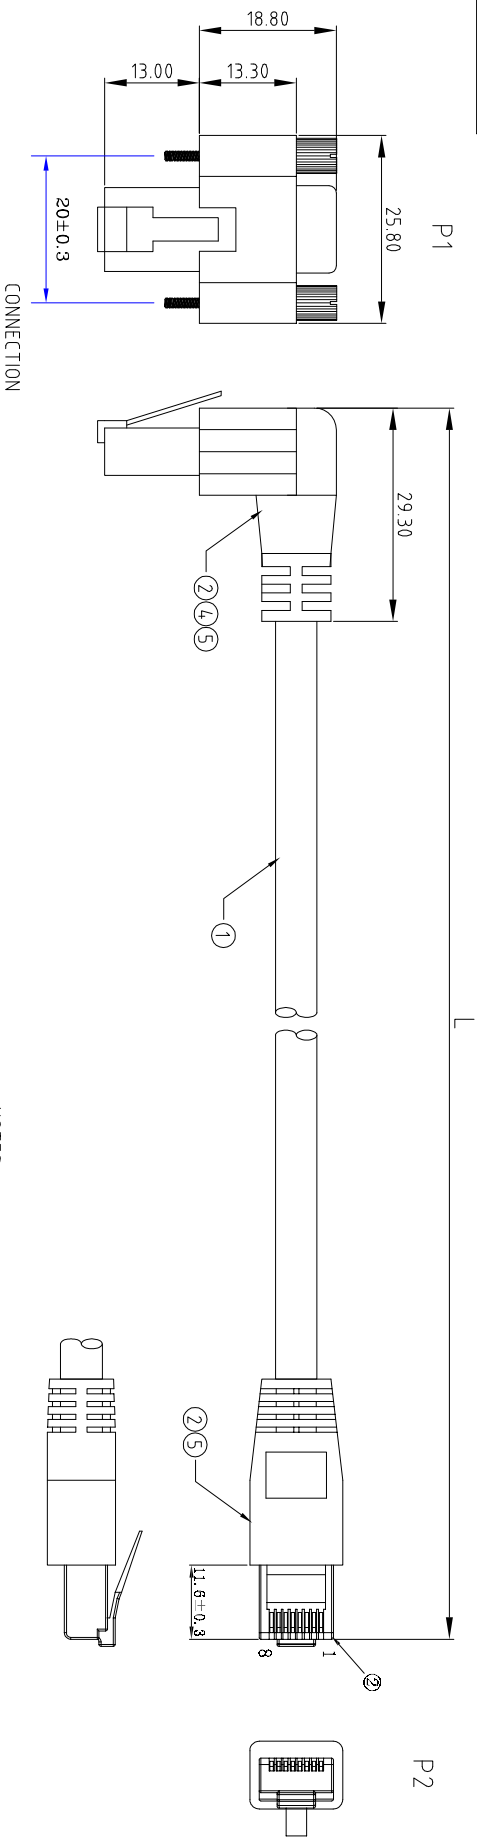

NOTES:

1. ELECTRICAL TEST : 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 10M OHMS MIN, AC 500V 0.01sec.
4. INSTANT BREAK : 3 SECONDS.
5. The dimensions must meet the surface requirements.
6. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.
7. Appearance of no dirt, damage, scratch, deformation and other undesirable phenomena.

P1	ORANGE/WHITE	P2	1
1	ORANGE	1	ORANGE
2	GREEN/WHITE	2	GREEN
3	GREEN	3	GREEN
4	BLUE	4	BLUE
5	BLUE/WHITE	5	BLUE/WHITE
6	BROWN/WHITE	6	BROWN
7	BROWN	7	BROWN
8	BRAID	8	SHELL

5	OVERMOLD	PVC 45P BLACK	NA
4	MOLD	LDPE	NA
3	SCREW	M2.0x0.4 1215Green steel(Ni plating)	2PCS
2	CONNECTOR	RJ45 CONNECTOR.8P8C MALE WITH SHELL.	2PCS
1	CABLE	CAT. 5 4P×26AWG.006.5高柔拖链电缆	NA

QUALITY SYMBOLS

□ :
MAJOR

▽ :
CRITICAL

▽ :
ZERO DEFECT

▽ :
S.P.C

Tolerance

R±(MM)
300~2000

A±(MM)
±50

2001~5000
±100

5001~
±150

NAME: 工业相机网线E08-0R-XM(90度螺丝固定型)

REV: A

SCALE: NONE

DATE: 2019/08/12

UNIT: mm

PART NO. 10899010X

DRW BY KING ZHOU

CHK BY JING LI

APP BY

DRAWING NO. A05-009210

QTY

DESCRIPTION

DATE

APPROVER

DESCRIPTION

东莞市箜国电子有限公司