



L = ±35MM

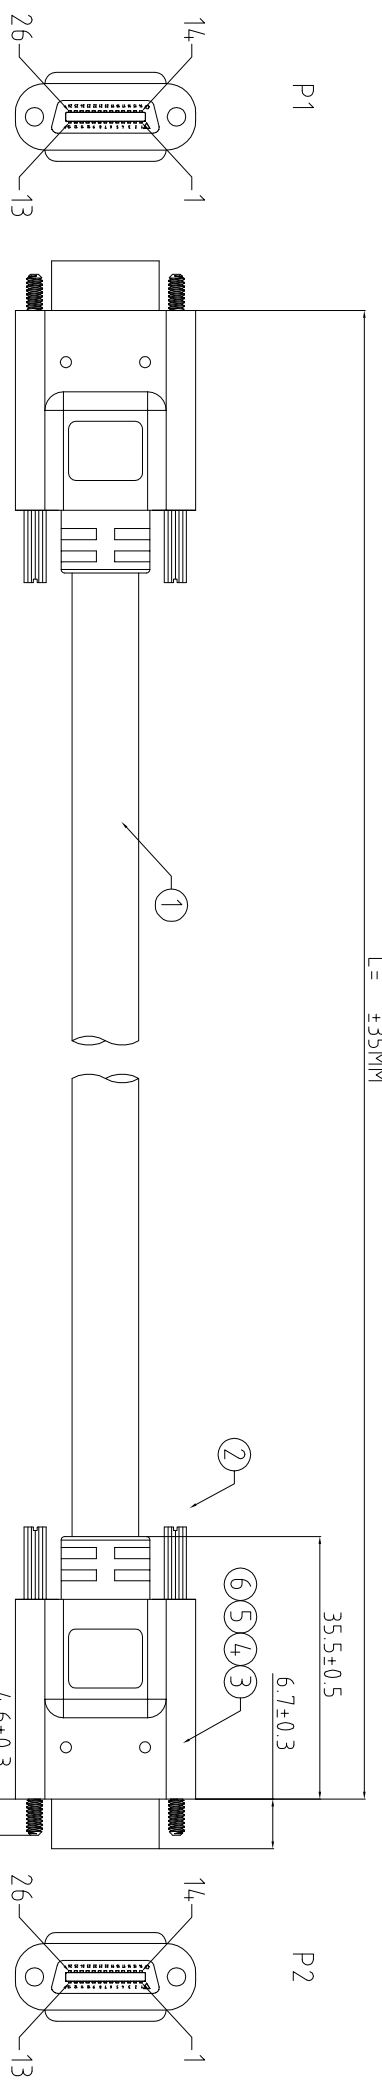

Wire Assignment:

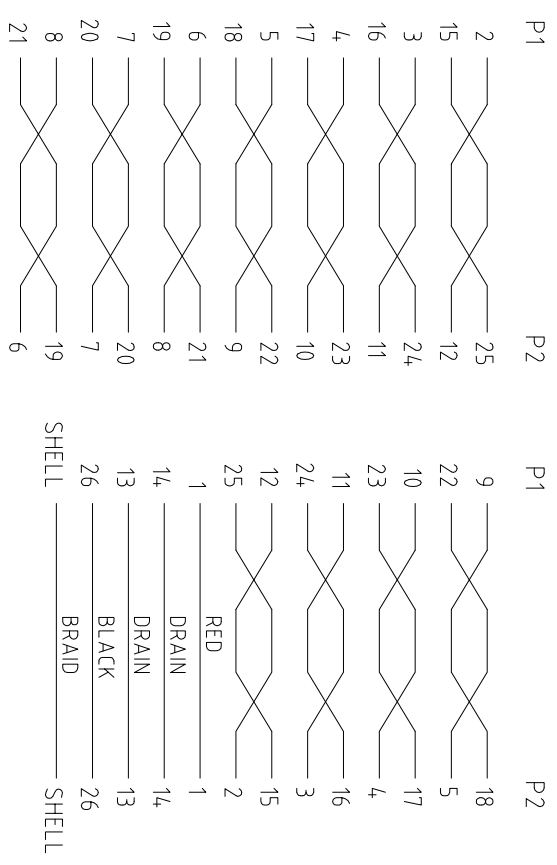

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+ALU)X11P+24AWGx2C+Dx2C+AB OD:9.0MM Jacket:Black PVC	1	mm
②	Screw	M2.0 Thumbscrew L=4.05MM	4	PCS
③	CONN	SDR 26P Male PIN:30U" Insulation:Black Shell:NI	2	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM

REMARK:
 <1>- THE PRODUCT IS "ROHS COMPLIANT".
 <2>- THE MARK "□" IS QC CHECK DIMENSIONS.

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100% TEST
2. DIELECTRIC WITHSTAND:AC100V/1MIN.
3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)
4. CONDUCTIVE RESISTANCE:See TABLE A

REV	ECN NO	DESCRIPTION	APPD.	DATE

Tolerance:	Approved by:	东莞市箐国电子有限公司
X. ±	LIAO	
.X ±	Checked by:	TEENG
.XX ± 0.3	Engineer by:	Jime
.XXX ±	Drawn by:	Dreawn
Angle:	Date:	08/08/2016
X° ±	Scale:	mm
.X° ±	Unit:	mm

Kinkuo P/N:	WAK-M001-XXXA
Description:	SDR CABLE
DWG. NO:	
SHEET: 1 OF 1	REV: A