


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000M Ω Min.
Temperature Range:-25°C to +85°C

PART NO.: B08-3W341140-X1

CURRENT RATING&DIMENSION ϕ A: _____

A: 10 AMPS ϕ 1.70mm
B: 20 AMPS ϕ 2.80mm
C: 30 AMPS ϕ 3.20mm
D: 40 AMPS ϕ 4.60mm

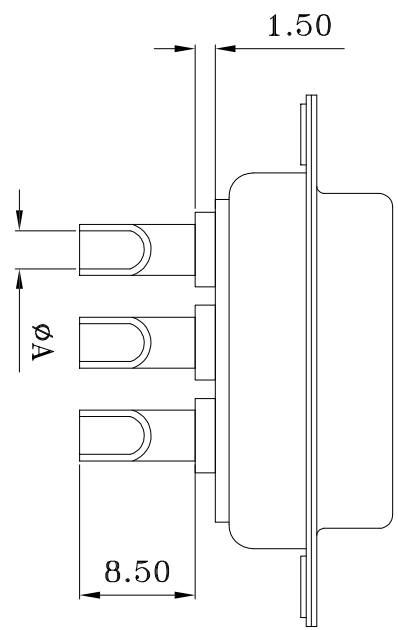

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	FRONT PLASTIC	STEEL	OVER-PLATING:Sn	
2	FRONT SHELL	STEEL	OVER-PLATING:NI	
2	HIGH POWER CONTACT	BRASS	PLATING:AU G/F	
1	SIGNAL CONTACT	BRASS	PLATING:AU G/F	

QUALITY SYMBOLS	Tolerance	NAME:	High-Power 3W3 Female Solder Type	PART NO.	B08-3W341140-X1	PART REMARKS			
□ :	X.	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
CRITICAL	X	SCALE:	N:1	DATE:	2012/09/26	DAWN HU	KING ZHOU		ADA-006
MAJOR	.X								
ZERO DEFECT	.XX								
S.P.C									

8	DATE	2012/09/26新版发行	DESCRIPTION	APPROVER	King Zhou
7	DATE		DESCRIPTION	APPROVER	
6	DATE		DESCRIPTION	APPROVER	
5	DATE		DESCRIPTION	APPROVER	
4	DATE		DESCRIPTION	APPROVER	
3	DATE		DESCRIPTION	APPROVER	
2	DATE		DESCRIPTION	APPROVER	
1	DATE		DESCRIPTION	APPROVER	

东莞市箐国电子有限公司