


High Power Contact Current Rating:  
10,20 or 40AMPS  
High Power Contact Resistance:  
2.7 Milliohms Max.  
Dielectric Withstanding Voltage:  
1000V AC For 1 Minute  
Insulation Resistance:5000MΩ Min.  
Temperature Range:-25°C to +85°C

PART NO.:

B08-3W331140-X1

CURRENT RATING&DIMENSION φA:

A:10 AMPS φ1.70mm  
B:20 AMPS φ2.80mm  
C:30 AMPS φ3.20mm  
D:40 AMPS φ4.60mm

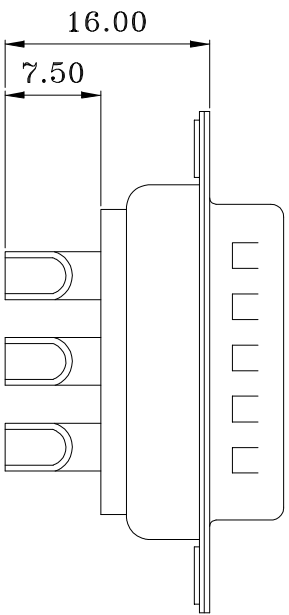

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	FRONT PLASTIC	STEEL	OVER-PLATING:Sn	
2	FRONT SHELL	STEEL	OVER-PLATING:NI	
2	HIGH POWER CONTACT	BRASS	PLATING:AU G/F	
1	SIGNAL CONTACT	BRASS	PLATING:AU G/F	

QUALITY SYMBOLS

☐: MAJOR

▽: CRITICAL

Tolerance

x. ±0.50

x ±0.30

.xx ±0.15

NAME: High-Power 3W3 Mole Solder Type

PART NO. B08-3W331140-X1

REV: B UNIT: mm

SCALE: N:1 DATE: 2012/09/26

DRW BY: KING\_ZHOU

PART REMARKS

REMARKS

DRAWING NO. ADB-004

东莞市箐国电子有限公司

APPROVER

King Zhou

DESCRIPTION

2012/09/26新版发行

DATE

2013/08/16修正料号

SIDE

8

7

6

5

4

3

2

1