


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO.:

B09-3V331140-X1

CURRENT RATING&DIMENSION ØA:

- A:10 AMPS Ø1.70mm
- B:20 AMPS Ø2.80mm
- C:30 AMPS Ø3.20mm
- D:40 AMPS Ø4.60mm

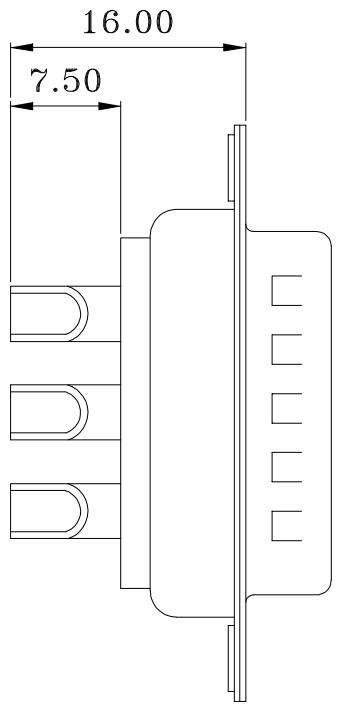

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	FRONT PLASTIC	STEEL	OVER-PLATING:Sn	
2	FRONT SHELL	STEEL	OVER-PLATING:NI	
2	HIGH POWER CONTACT	BRASS	PLATING:AU G/F	
1	SIGNAL CONTACT	BRASS	PLATING:AU G/F	

QUALITY SYMBOLS

□ : MAJOR

△ : CRITICAL

▽ : ZERO DEFECT

S.P.C

Tolerance

X: ±0.50

.x: ±0.30

.xxx: ±0.15

NAME: High-Power 3V3 Male Solder Type

REV: B

SCALE: N:1

DATE: 2012/09/26

PART NO. B09-3V331140-X1

DRW BY DAW NHU

CHK BY KING ZHOU

APP BY

DRAWING NO. ADB-004

东莞市箐国电子有限公司

DATE	DESCRIPTION	APPROVER
2013/08/16	修正料号	King Zhou
2012/09/26	新版发行	King Zhou