


ROHS

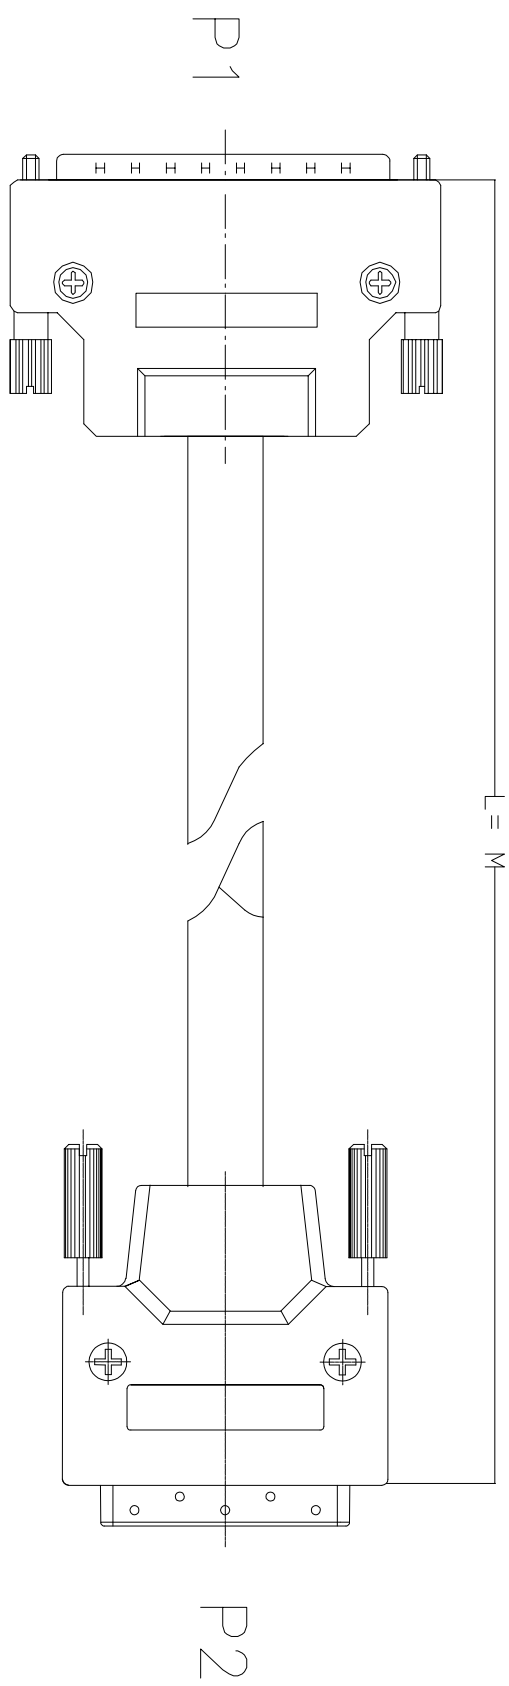


PIN ASSIGNMENT


| P1 | SIGNAL | P2 |
|------|--------|------|
| 1 | | 1 |
| 2 | | 2 |
| 3 | | 3 |
| 4~65 | | 4~65 |

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN. DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

A09-06861-XXX-01
 Length
 005 = 0.5M
 010 = 1.0M
 ~
 100 = 10.0M

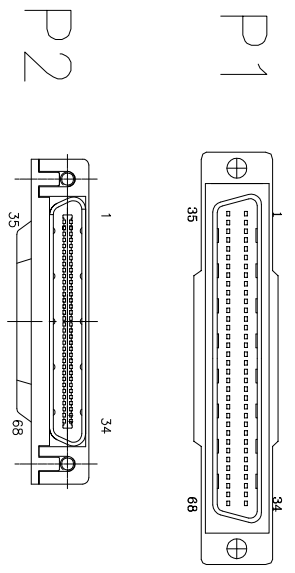

QUALITY SYMBOLS



CRITICAL
 MAJOR
 MINOR

| UNIT | SCALE | TOLERANCES |
|------|-------|--------------------------|
| mm | 2:1 | DIM. ±0.10 ANGLE: ±1° |

| ITEM | PART NAME | DESCRIPTION | PART NO. | QTY |
|------|-----------|---|------------------|------|
| 1 | CABLE | UL20276 28AWG*34P+AL+BRAID PVC JACKET COLOR:BLACK/GRAY OD=10.00mm | A09-06861-XXX-01 | 1PCS |
| 2 | CONNECTOR | VHDCI 68PIN MALE ASS'Y TYP EL | A09-06861-XXX-01 | 1SET |
| 3 | CONNECTOR | HPDB SCSI 68Pin Male ASS'Y TYPE | A09-06861-XXX-01 | 1SET |

东莞市箐国电子有限公司

| REV | DESCRIPTION | DATE | ZERO DEFECT | S.P.C | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-----|-------------|------------|-------------|-------|---|---|---|---|---|---|---|---|
| A | 图面发行 | 2014-09-12 | √ | √ | | | | | | | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.