
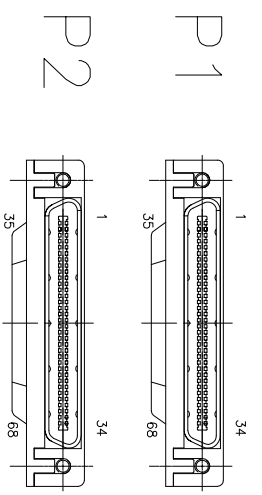


ROHS

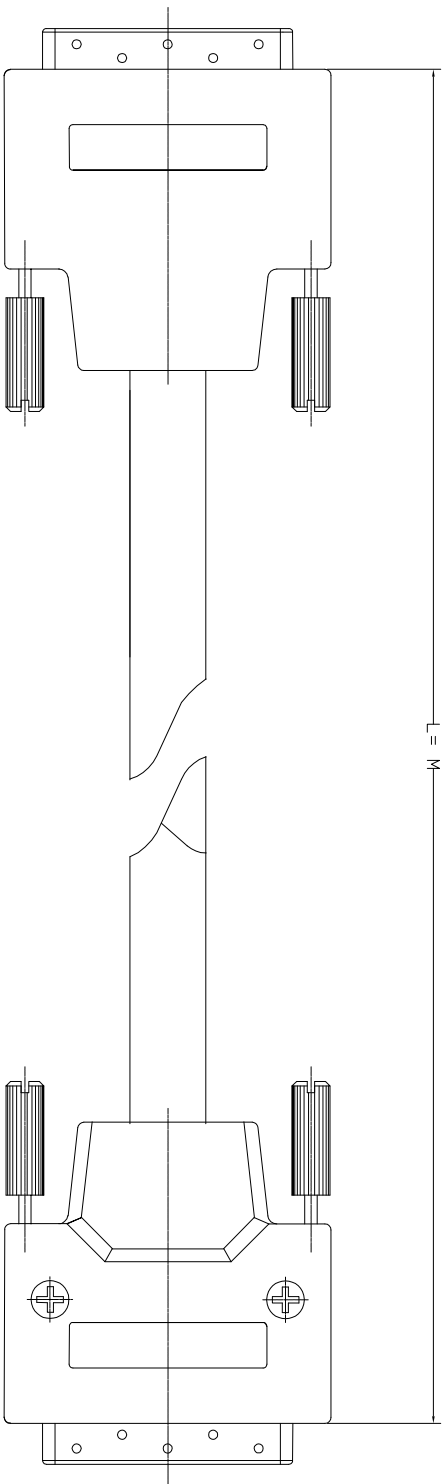

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~65		4~65
66		66
67		67
68		68
Shell		Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

A09-06861-XXX-02

Length  
 005 = 0.5M  
 010 = 1.0M  
 ~  
 100 = 10.0M

QUALITY SYMBOLS  
 ■ : CRITICAL  
 ▽ : MAJOR  
 ▽ : ZERO DEFECT S.P.C

UNIT	SCALE	TOLERANCES
mm	2:1	DIM. ±0.10 ANGLE: ±1°

ITEM	PART NAME	DESCRIPTION	PART NO.	QTY
3	CABLE	UL20276 28AWG*34P+AL+BRAID PVC JACKET COLOR:BLACK OD=10.00mm	A09-06861-XXX-02	1PCS
2	CONNECTOR	VHDCI 68PIN MALE ASS'Y TYP EL	A09-06861-XXX-02	1SET
1	CONNECTOR	VHDCI 68PIN MALE ASS'Y TYP EL	A09-06861-XXX-02	1SET

东莞市箐国电子有限公司

QUALITY SYMBOLS  
 ■ : CRITICAL  
 ▽ : MAJOR  
 ▽ : ZERO DEFECT S.P.C

REV	DESCRIPTION	DATE
A	图面发行	2022-03-30