RoHS

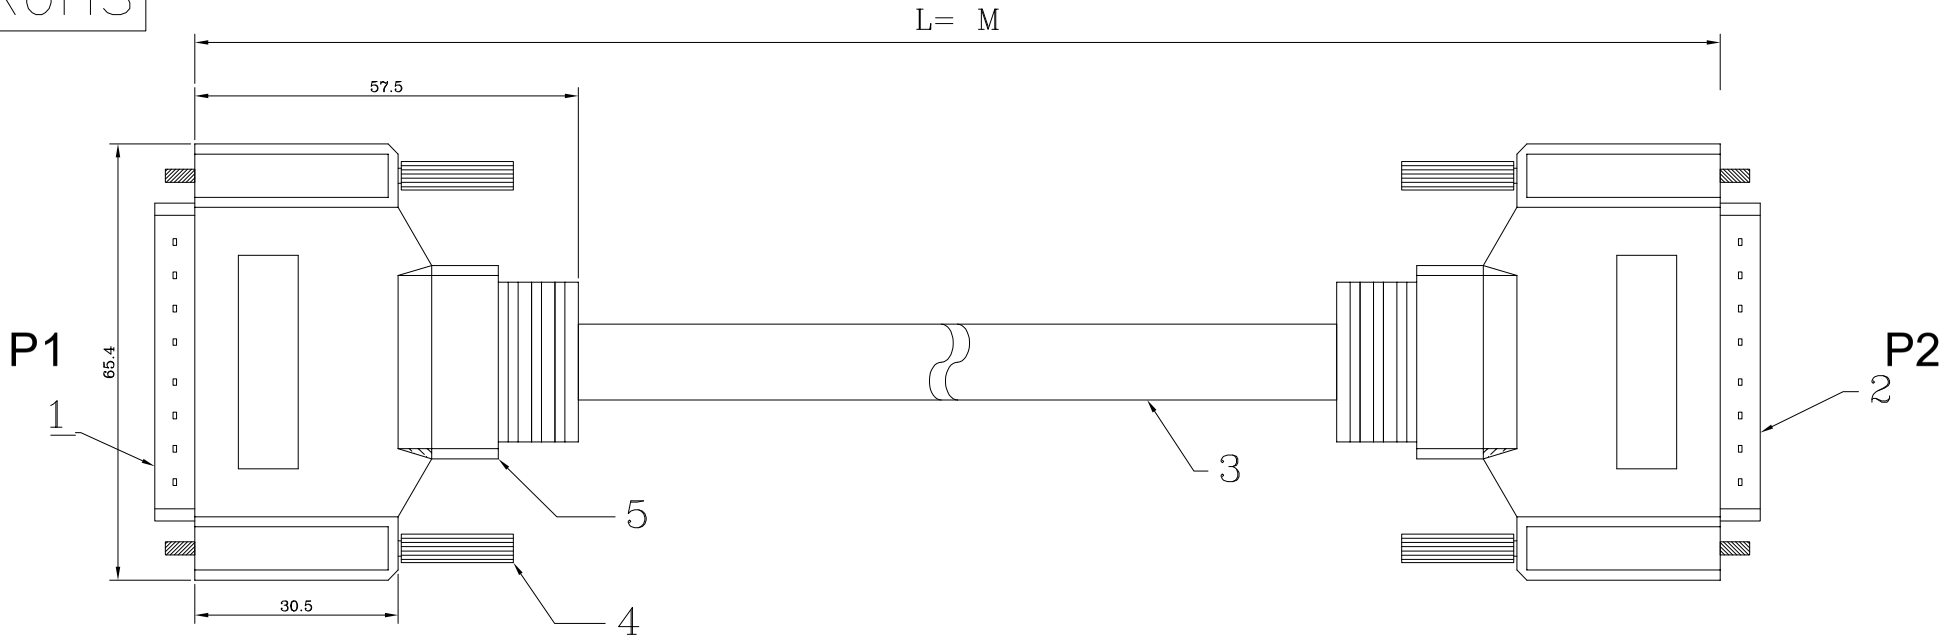

A09-06811-XXX-01

Length

005= 0.5M

010= 1.0M

~

100= 10.0M

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

P 1

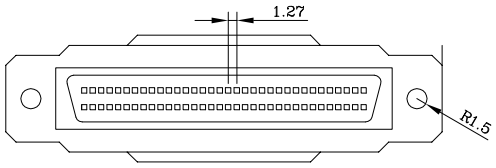

P 2

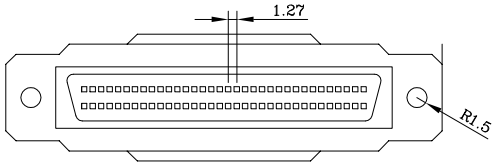

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~65		4~65
66		66
67		67
68		68
Shell		Shell

ITEM	PART NAME	DESCRIPTION	QY'T
5	OVERMOLD	45P PVC COLOR: BLACK	NA
4	SCREW	SCREW 2-56# Ni	4PCS
3	CABLE	UL2919 28AWG*34P+AL+BRAID PVC JACKET COLOR:BLACK OD=10.00mm	1PCS
2	CONNECTOR	SCSI DB 68P MALE Connector	1PCS
1	CONNECTOR	SCSI DB 68P MALE Connector	1PCS

REV	DESCRIPTION	DATE
A	图面发行	2022-02-20

QUALITY SYMBOLS

■: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽: S.P.C

UNIT	SCALE	TOLERANCES
mm	2:1	DIM. ±0.10 ANGLE: ±1°

东莞市箐国电子有限公司

APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	A09-06811-XXX-01	SHT	1/1
				DESCRIPTION	SCSI-II 68Pin CABLE Molding Type		
				DRAWING NO.		REV	A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.