


ROHS

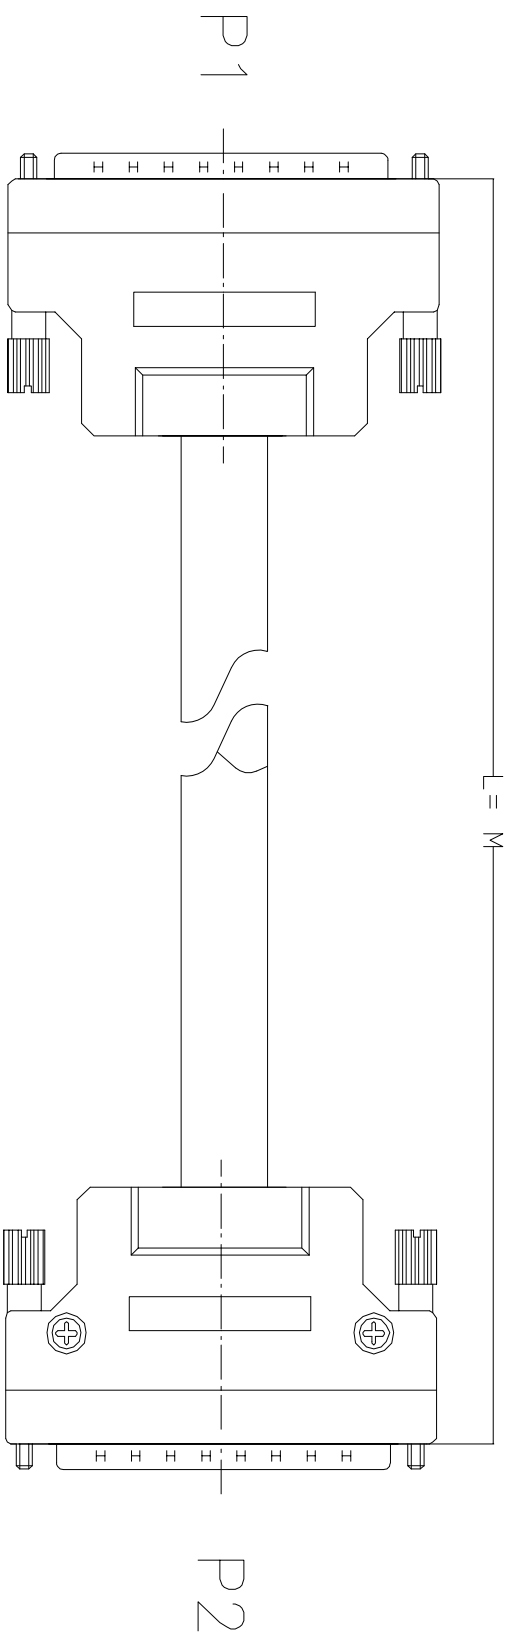

A08-06811-XXX-02


Length
 005 = 0.5M
 010 = 1.0M
 ~
 100 = 10.0M

PIN ASSIGNMENT

| P1 | SIGNAL | P2 |
|------|--------|------|
| 1 | | 1 |
| 2 | | 2 |
| 3 | | 3 |
| 4~65 | | 4~65 |


NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

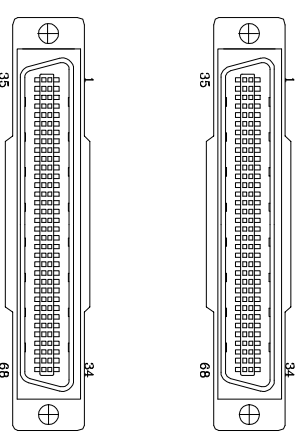

QUALITY SYMBOLS

CRITICAL
 MAJOR
 S.P.C



| UNIT | SCALE | TOLERANCES |
|------|-------|--------------------------|
| mm | 2:1 | DIM. ±0.10 ANGLE: ±1° |

| ITEM | PART NAME | DESCRIPTION | PART NO. | QTY |
|------|-----------|--|------------------|------|
| 3 | CABLE | UL20276 28AWG*34P+AL+BRAID PVC JACKET COLOR:GRAY OD= 10.00mm | A08-06811-XXX-02 | 1PCS |
| 2 | SHELL | HPCN SCSI 68Pin Male ASS'Y TYPE ZINC SHELL | A08-06811-XXX-02 | 2PCS |
| 1 | CONNECTOR | HPCN SCSI 68Pin Male ASS'Y TYPE | A08-06811-XXX-02 | 2PCS |

| REV | DESCRIPTION | DATE | ZERO DEFECT | 东 莞 市 箐 国 电 子 有 限 公 司 | REV |
|-----|-------------|------------|-------------|-----------------------|-----|
| A | 图面发行 | 2006-05-22 | | | A |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.