
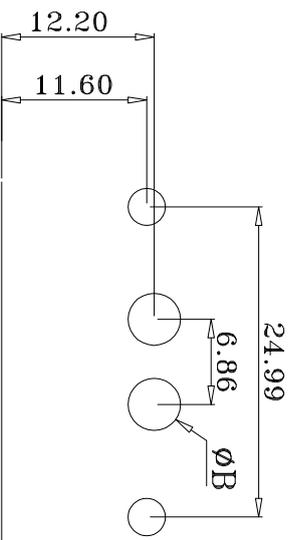


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO: B08-2W25114D-X1

Current Rating: _____
A = 10 AMPS Dim.A ϕ 1.7 Dim.B ϕ 2.2
B = 20 AMPS Dim.A ϕ 2.8 Dim.B ϕ 3.3
C = 30 AMPS Dim.A ϕ 3.2 Dim.B ϕ 3.7
D = 40 AMPS Dim.A ϕ 3.7 Dim.B ϕ 4.2

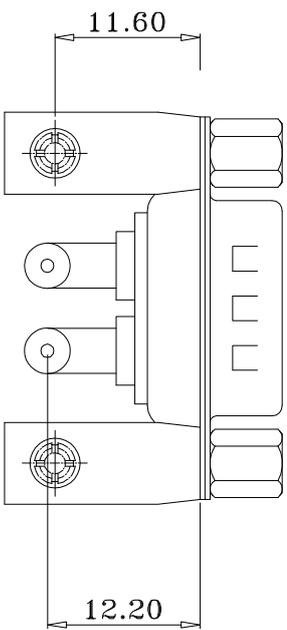

PCB LAYOUT

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
6	JACKSCREWS	BRASS	PLATING:NI	
5	HOUSING	PBT+30%GF	COLOR:WHITE	
4	RIVETED INSERT	BRASS	PLATING:NI	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:NI	
1	TERMINAL	BRASS	TERMINAL FINSH:FULL GOLD FINISHED 2u"	

QUALITY SYMBOLS

Tolerance

□ : CRITICAL
⊠ : MAJOR
∇ : ZERO DEFECT S.P.C

NAME: 2W2 Male R/A Type With Bracket+Nut PART NO. B08-2W25114D-X1

REV: A UNIT: mm DRW BY: CHK BY: APP BY: DRAWING NO. B08-001

SCALE: N:1 DATE: 2012/11/19 JINGLI KING ZHOU

东莞市箐国电子有限公司

A	DATE	DESCRIPTION	APPROVER
Δ	2012/11/19	NEW ISSUE	JINGLI

8 7 6 5 4 3 2 1