
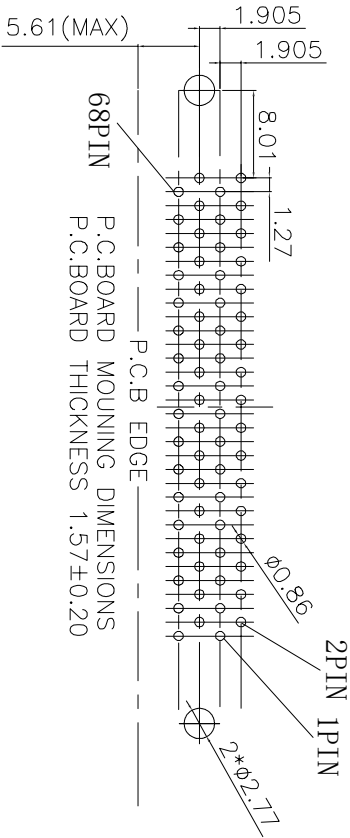
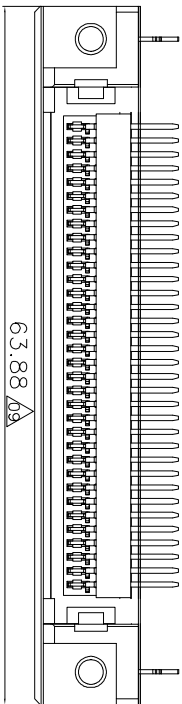
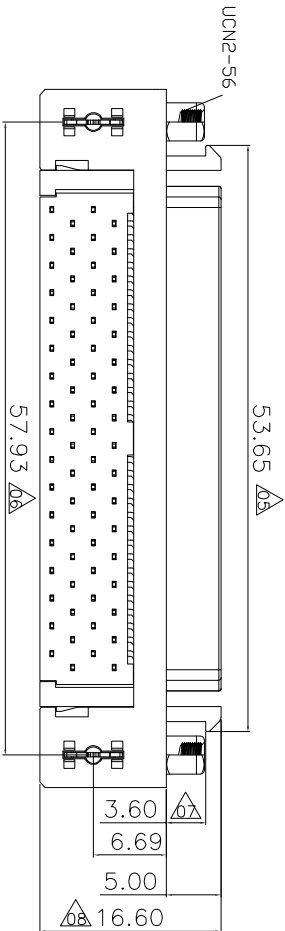



- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B02-068611EC-2 L

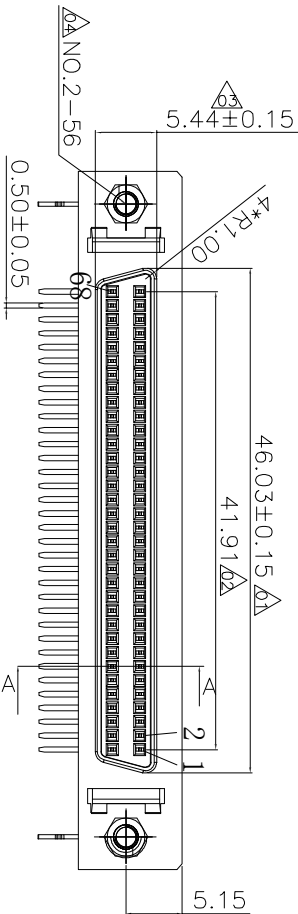

3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	ZINC ALLOY	PLATING:NI	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS		tolerance		NAME:		SCS-II 68P Female R/A DIP Type For PCB		PART NO.		B02-068611EC-2 L	
□ :	✕ :	X.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-036
CRITICAL	MAJOR	.X	±0.30	SCALE:	N:1	DATE:	2011/10/19	JINGLI	KING ZHOU		
▽ : ZERO DEFECT	▽ : S.P.C	.XX	±0.25	<div><div></div><div></div></div>							

东莞市箐国电子有限公司

东莞市箐国电子有限公司

2011/10/19
NEW ISSUE
JINGLI

DATE

DESCRIPTION

APPROVER

8

7

6

5

4

3

2

1