


ROHS

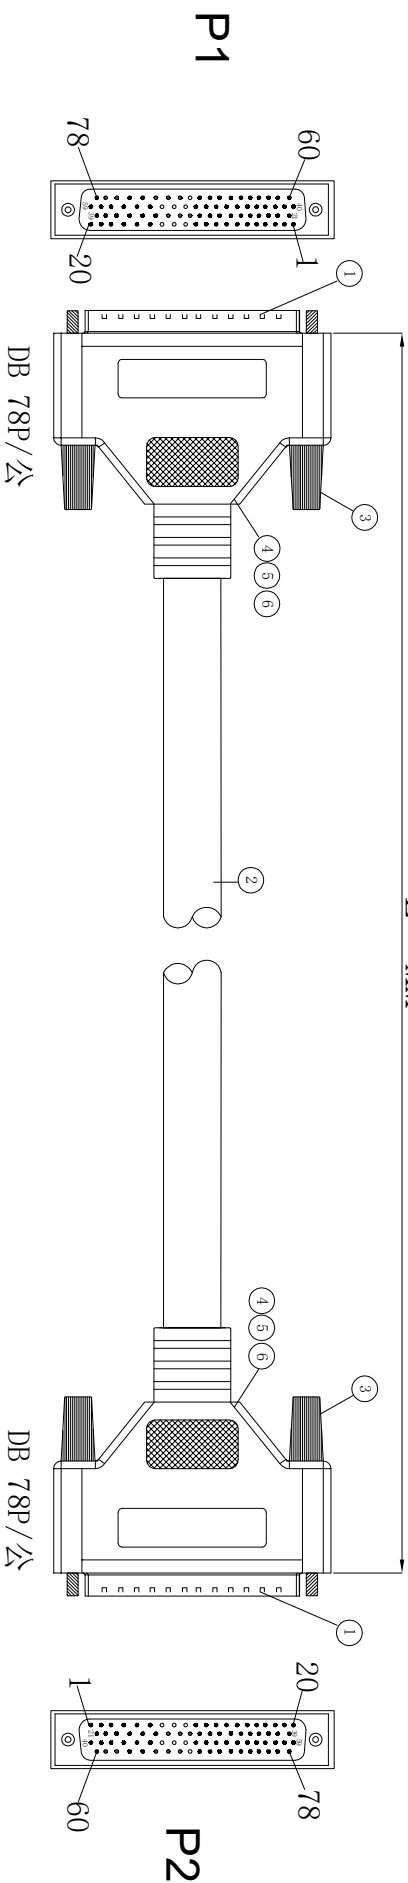

L= MM

PIN ASSIGNMENT

1		1
2		2
3		3
4		4
---		---
---		---
75		75
76		76
77		77
78		78
SHELL		SHELL

Port NO	LENGTH	REMARK
1 FC-DB078MM-01A	L=500MM	±15MM
2 FC-DB078MM-02A	L=1000MM	±30MM
3 FC-DB078MM-03A	L=2000MM	±35MM
4 FC-DB078MM-04A	L=3000MM	±50MM
5 FC-DB078MM-05A	L=5000MM	±80MM

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QTY
6	COPPER FOIL	COPPER FOIL W=25MM	NA
5	OVERMOLD	4SP PVC COLOR: BLACK	NA
4	MOLD	PE	NA
3	SCREW	SCREW 4-40# NI Black	4PCS
2	CABLE	UL20276 28AWG*39P+AL+BRAID PVC JACKET BLACK DD105	1PCS
1	CONNECTOR	D-SUB 78Pin Male Solder WHITE TYPE	2PCS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

QUALITY SYMBOLS



CRITICAL
MAJOR
MINOR



TOLERANCES
DIM: ±0.10
ANGLE: ±1°

UNIT: mm
SCALE: 2:1

东 莞 市 箐 园 电 子 有 限 公 司

REV	DESCRIPTION	DATE	ZERO DEFECT	S.P.C
A	图面发行	2021-11-10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	DESCRIPTION	HT	1/1
					HDB 78P Male to Male CABLE		
DRAWING NO.							

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1

H

G

A

A

E

D

C

B

B

A

A