
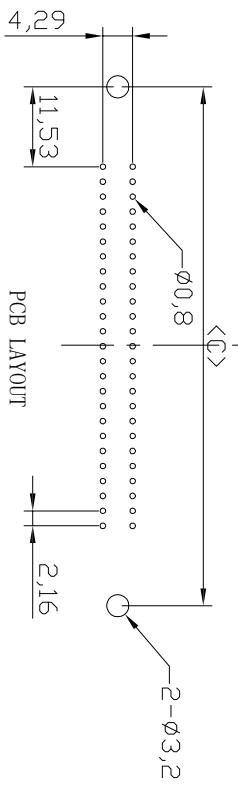


Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 1000M Ω Min.
 Temperature Range: -25°C to +85°C

PART NO: B17-0XXX8X1AN-01
 CONTACT NO.: _____

14: 14PIN
 24: 24PIN
 36: 36PIN
 50: 50PIN
 64: 64PIN
 HOUSING COLOR: _____
 1:BLACK
 6:BLUE

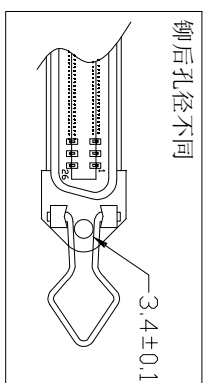

Positions	A	B	C	D
14	12.96	25.2	36.0	44.0
24	23.76	36.0	46.8	54.8
36	36.72	48.9	59.7	67.7
50	51.84	64.0	74.9	82.8
64	66.96	79.3	89.97	98.0


ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	HOOK	STEEL	OVER-PLATING: Ni	
3	HOUSING	PBT+30%G.F.(UL 94V-0)	COLOR:SEE PART NO.	
2	SHELL	SPPC	OVER-PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:Sn UNDER-PLATING:Ni	

QUALITY SYMBOLS

Tolerance

: CRITICAL
 : MAJOR
 ▽ : ZERO DEFECT
 ▽ : S.P.C

X : ±0.50
 .X : ±0.30
 .XX : ±0.25



NAME: 57母-180度DIP新四勾耳5.4 PART NO. B17-0XXX8X1AN-01

REV.	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2016/09/26	JINGLI	KING ZHOU		B17-005

东 莞 市 箐 国 电 子 有 限 公 司

A	DATE	2016/09/26	DESCRIPTION	NEW ISSUE	APPROVER	JINGLI
8	SIDE					

7	DESCRIPTION		APPROVER	
6				
5				
4				
3				
2				
1				