



RoHS

L ± 50MM

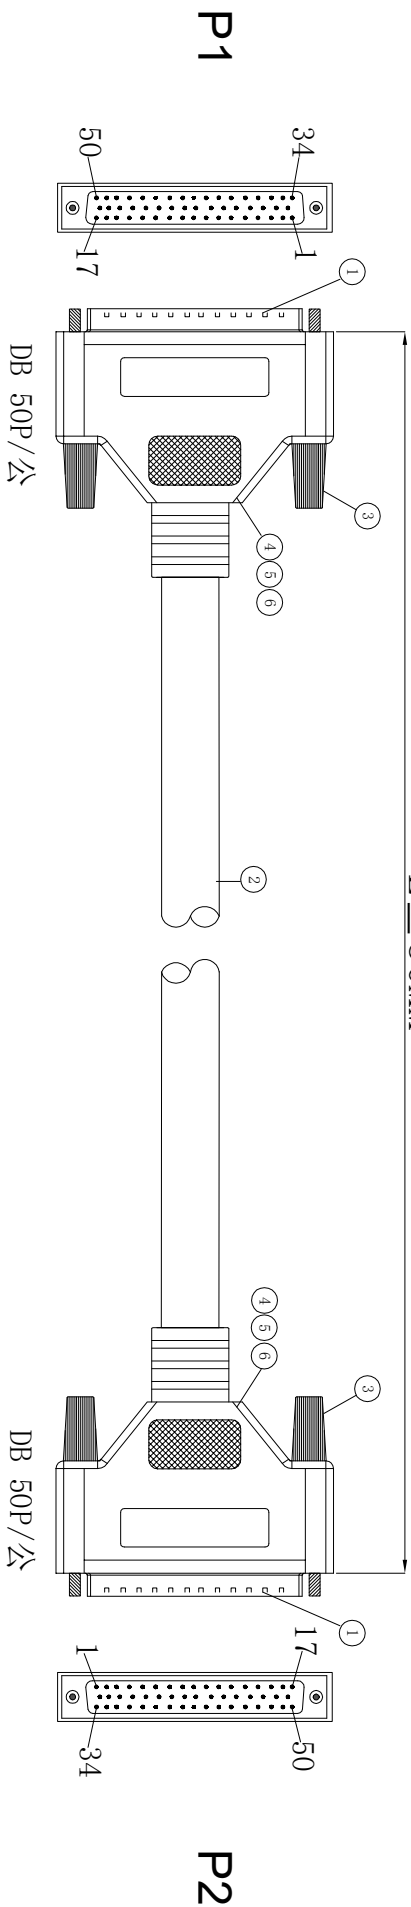

PIN ASSIGNMENT

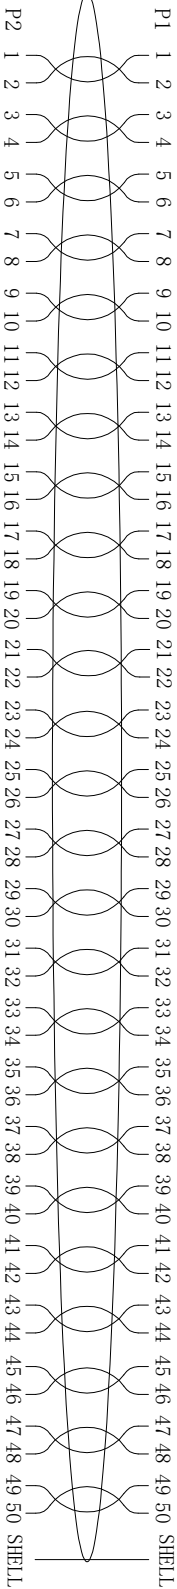

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

Part NO	LENGTH	REMARK
1 FC-DB050MM-01A	L=500MM	±15MM
2 FC-DB050MM-02A	L=1000MM	±30MM
3 FC-DB050MM-03A	L=2000MM	±35MM
4 FC-DB050MM-04A	L=3000MM	±50MM
5 FC-DB050MM-05A	L=5000MM	±80MM

7					
6	COPPER FOIL	COPPER FOIL W=25MM			NA
5	OVERMOLD	4SP PVC COLOR: BLACK			NA
4	MOLD	PE			NA
3	SCREW	SCREW 4-40# NI (Q24 BLACK)			4PCS
2	CABLE	UL20276 28AWG*25P+AL+BRAID PVC JACKET BLACK DD8.5			1PCS
1	CONNECTOR	D-SUB 50Pin Male Solder WHITE TYPE			2PCS

QUALITY SYMBOLS



UNIT: mm SCALE: 2:1 TOLERANCES: DIM: ±0.10 ANGLE: ±1°

ITEM APPROVED CHECKED

PART NAME DESIGN DRAWN

DESCRIPTION PART NO.

SHT 1/1 QY/T

REV A 2017-08-22

DESCRIPTION DATE

ZERO DEFECT S.P.C

东莞市箐国电子有限公司

DESCRIPTION HDB 50P Male to Male CABLE

DRAWING NO.

REV A

8

7

6

5

4

3

2

1