



RoHS

L = MM

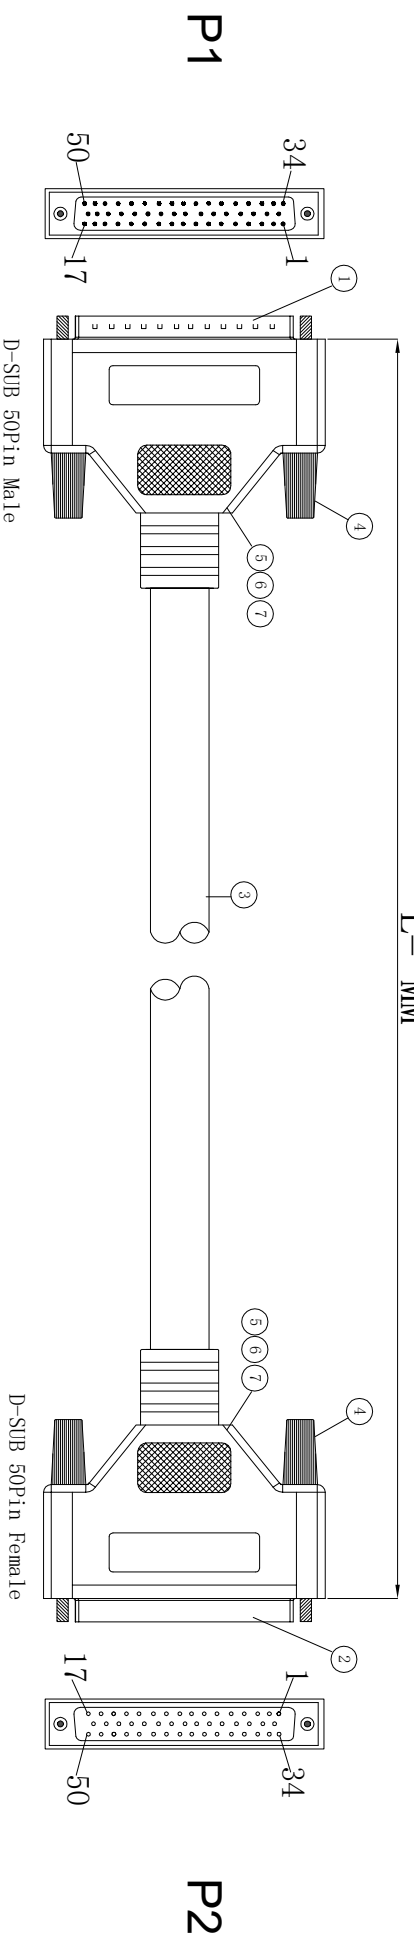

PIN ASSIGNMENT

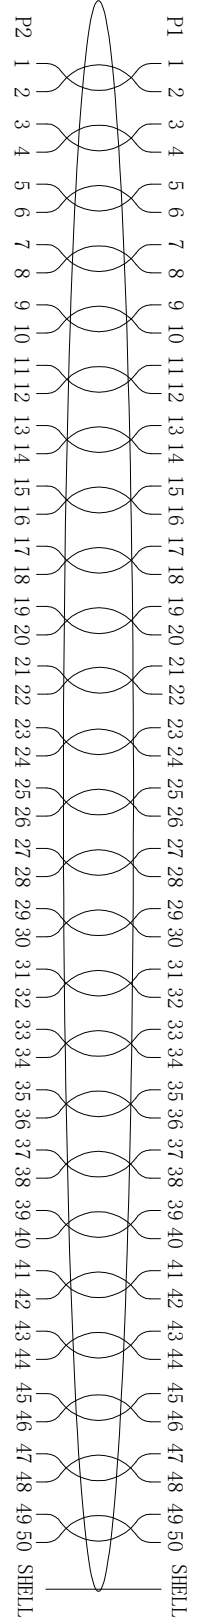

Part NO	LENGTH	REMARK
1 FC-DB050MF-01A	L=500MM	±15MM
2 FC-DB050MF-02A	L=1000MM	±30MM
3 FC-DB050MF-03A	L=2000MM	±35MM
4 FC-DB050MF-04A	L=3000MM	±50MM
5 FC-DB050MF-05A	L=5000MM	±80MM


ITEM	PART NAME	DESCRIPTION	PART NO.	QTY
1	CONNECTOR	D-SUB 50Pin Male Solder WHITE TYPE		1PCS
2	CONNECTOR	D-SUB 50Pin Female Solder WHITE TYPE		1PCS
3	CABLE	UL20276 28AWG*25P+AL+BRAID PVC JACKET BLACK DD:8.5		1PCS
4	SCREW	SCREW 4-40# NICKEL BLACK		4PCS
5	MOD.D	PE		NA
6	OVERMOLD	4SP PVC COLOR: BLACK		NA
7	COPPER FOIL	COPPER FOIL W=25MM		NA

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

QUALITY SYMBOLS



UNIT: mm SCALE: 2:1 TOLERANCES: DIM. ±0.10 ANGLE: ±1°

东莞市誉国电子有限公司

DATE: 2017-08-22

REV	DESCRIPTION	DATE
A	图面发行	2017-08-22

REV	DESCRIPTION	DATE	REV	DESCRIPTION	DATE
A	图面发行	2017-08-22	A	图面发行	2017-08-22