

1

2

1

2

3

4






5

6

RoHS Compliant

Customer Drawing

Rev	Date	Description	B.Y.	ECN NO.
A0	2017.05.22	New Drawing	Owen	

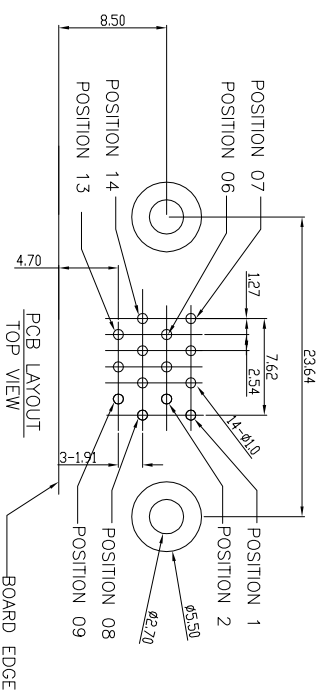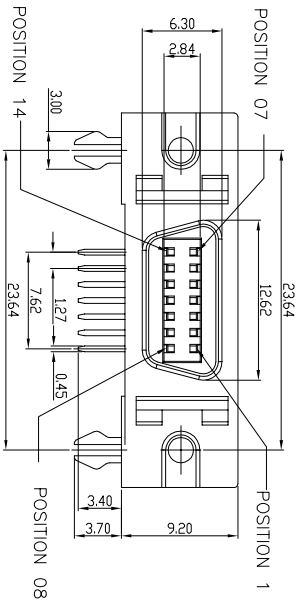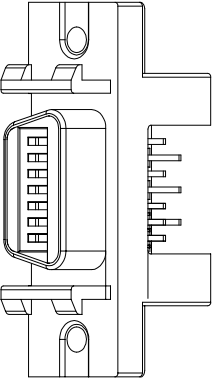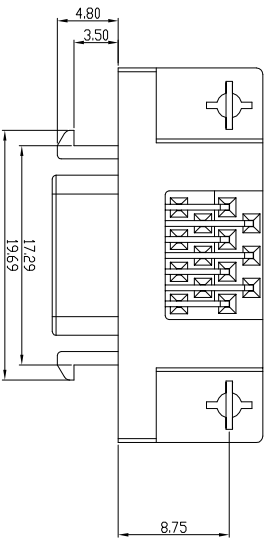

NOTE:

- MATERIAL:
 - INSULATOR: PBT BLACK UL 94V-0
 - COVER: LCP BLACK UL94-V0
 - CONTACT: COPPER ALLOY (T=0.30mm)
 - SHELL: Zinc alloy.

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RATING: 30 VAC
 - CONTACT CURRENT RATING: 0.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 60S.
 - INSULATION RESISTANCE 500mΩ MIN INITIAL
 - OPERATING TEMPERATURE: -45°C ~ 85°C

- PLATING
 - TERMINAL: 50u" MIN NICKEL ALL OVER 80u" MIN TIN ON SOLDER AREA 30u" GOLD ON CONTACT AREA
 - SHELL: 100u" MIN NICKEL OVER 50u" MIN COPPER

- Ordering information:
 - B03-XXX - 618 X 7-01
 -

- No. of Contacts:

014=14pins	020=20pins
026=26pins	036=36pins
050=50pins	068=68pins
- Contact Finishes:

A=Gold Flash Selective Plating
C=3u" Gold Selective Plating
H=15u" Gold Selective Plating

- TOLERANCES - UNLESS OTHERWISE SPECIFIED		Title: SCS1 CN-14P Female 90° DIP	
0. =±.40	0' =±.30'	Appd: BXT	P/N: B03-014618X7-01
0.0 =±.35	0.0' =±2.5'	Check: BXT	Date
0.00=±.3	0.00' =±2.0'	Draw.: DL	Scale Unit Type Page
			Free MM Z 1/1

东莞市箐国电子有限公司