



| REV. | DESCRIPTION | DATE |
|------|-------------|------|
| △ | | |
| △ | | |

RoHS

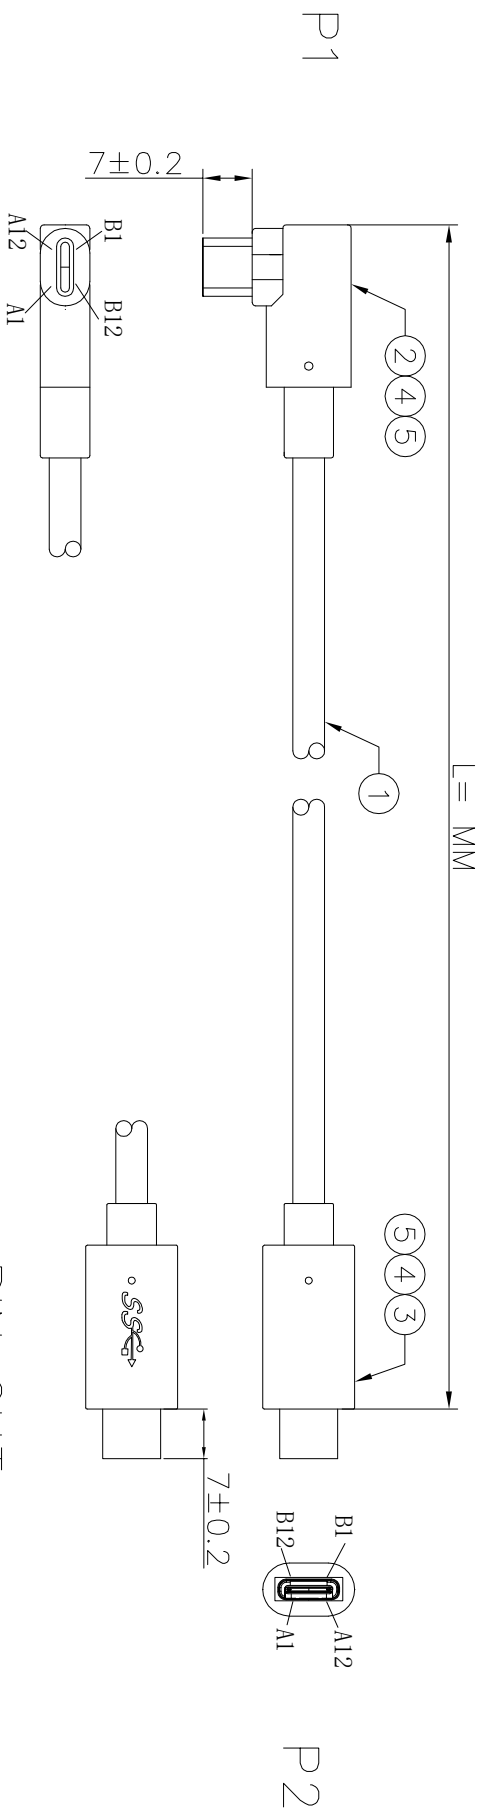

PIN OUT

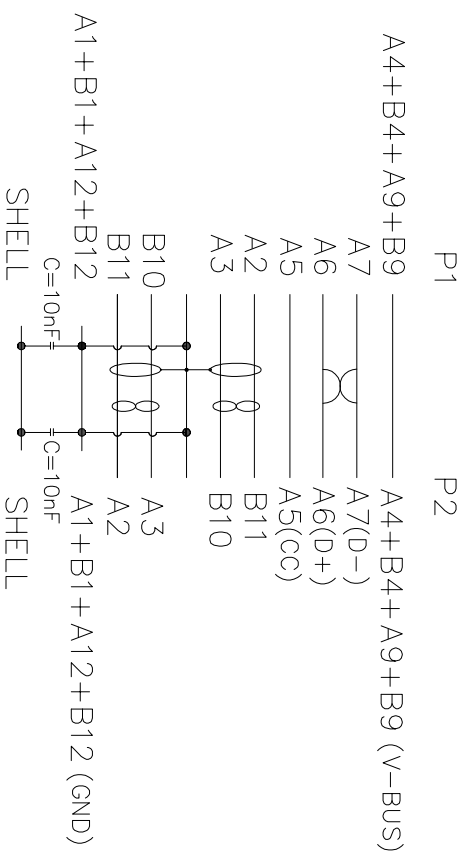

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

| | | | | | | | | | | |
|-----|--------------|--|------|--------|-----------|---|---------------------|-----------------------|---------------|----------------|
| 5 | Over mold | PVC 50P BLACK | 30G | | | 东莞市盈国电子有限公司 UNLESS OTHERWISE SPECIFIED TOLERANCE : xx ± x.xx ± ; angles : ° | DESCRIPTION: | CUSTOMER P/N: | SCALE: NONE | |
| 4 | Inter mold | PE | 10G | | | | DESCRIPTION: | LKU31CMM20-X | SHEET: 1 of 1 | |
| 3 | CONN 2 | TYPE-C Male color Black PIN/GF | 1PCS | | | | DESCRIPTION: | USB Type-C Male Cable | | |
| 2 | CONN 1 | TYPE-C Male Color black PIN AU: G/F with PCBA | 1PCS | | | | DRAWN: | | | |
| 1 | CABLE | UL20276 (USB3.0) (1P#32+DAM)*2C+2C#22+1P#32+1C#32 +AEB(AL) OD: 4.5MM BLACK | 1PCS | | | | CHECKED: | | | |
| NO. | MATERIAL.P/N | DESCRIPTION | Q'TY | VENDOR | APPROVED: | | DWG NO: 20210303-01 | REV: X/0 | UNIT: mm | DATE: 21.03.03 |