



REV.	DESCRIPTION	DATE
△		
△		

**RoHS**

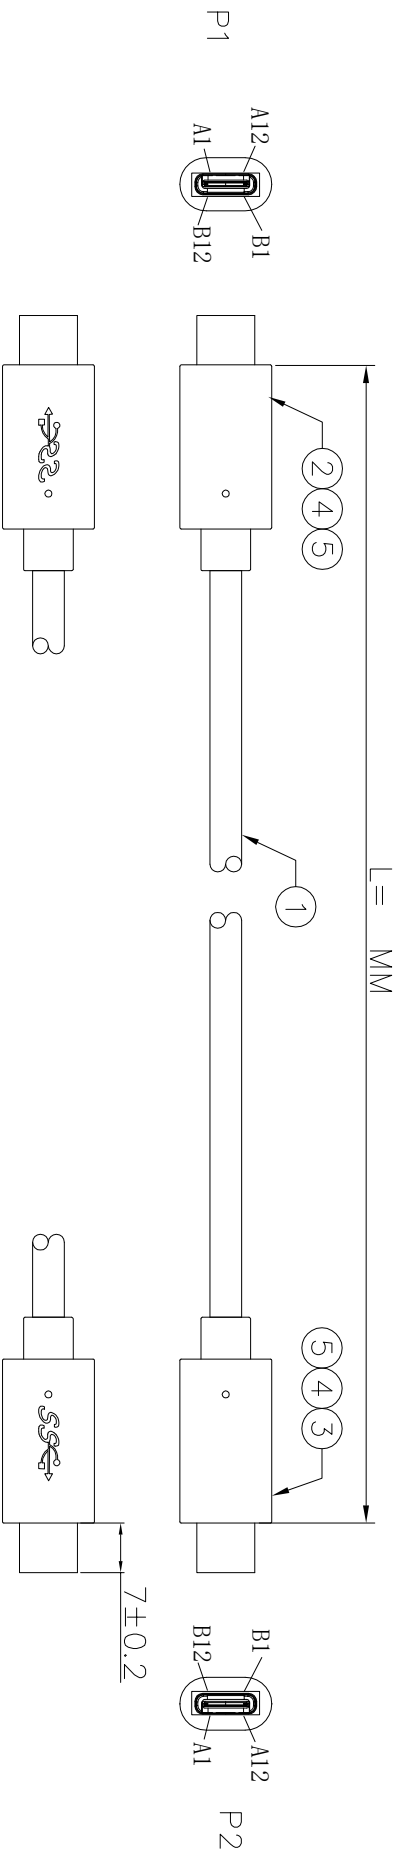

**PIN OUT**

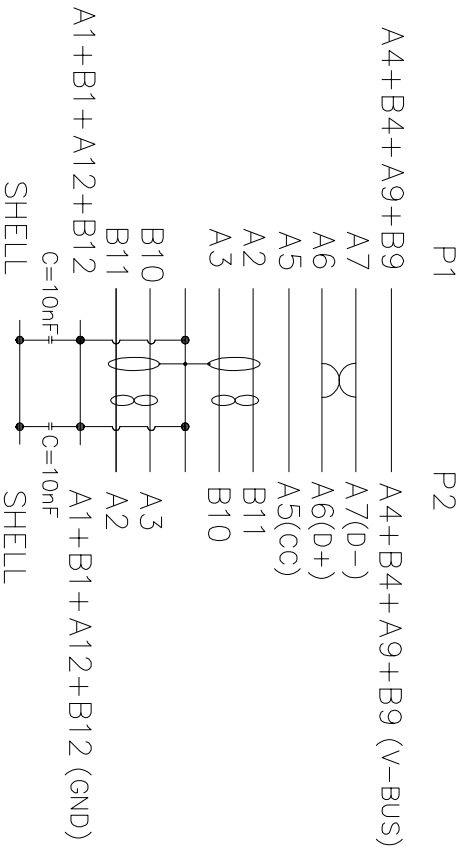

- NOTE:**
1. 100% OPEN & SHORT WIRE TEST;
  2. CONTACT RESISTANCE 2ohm Max;
  3. INSULATION RESISTANCE 10M ohm Min;
  4. HI-POT DC 300V;

5	Over mold	PVC 50P BLACK	30G		<p><b>东莞市箐围电子有限公司</b></p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCE: xx±, :onges ±, : DRAWN: : CHECKED: : APPROVED: :</p> <p>DESCRIPTION: USB Type-C Male Cable</p> <p>CUSTOMER P/N: LKU31CMM10-X</p> <p>PRODUCT NO.: : DWG NO: 20210303-01</p> <p>SCALE: NONE</p> <p>SHEET: 1 of 1</p>
4	Inter mold	PE	10G		
3	CONN 2	TYPE-C Male color Black PIN AU:G/F	1PCS		
2	CONN 1	TYPE-C Male Color black PIN AU:G/F	1PCS		
1	CABLE	UL20276 (USB3.0) (1P#32+DAM)*2C+2C#22+1P#32+1C#32 +AEB(AL) OD:4.5MM BLACK	1PCS		
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	