

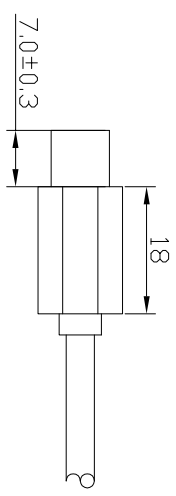


REV.	DESCRIPTION	DATE
△		
△		

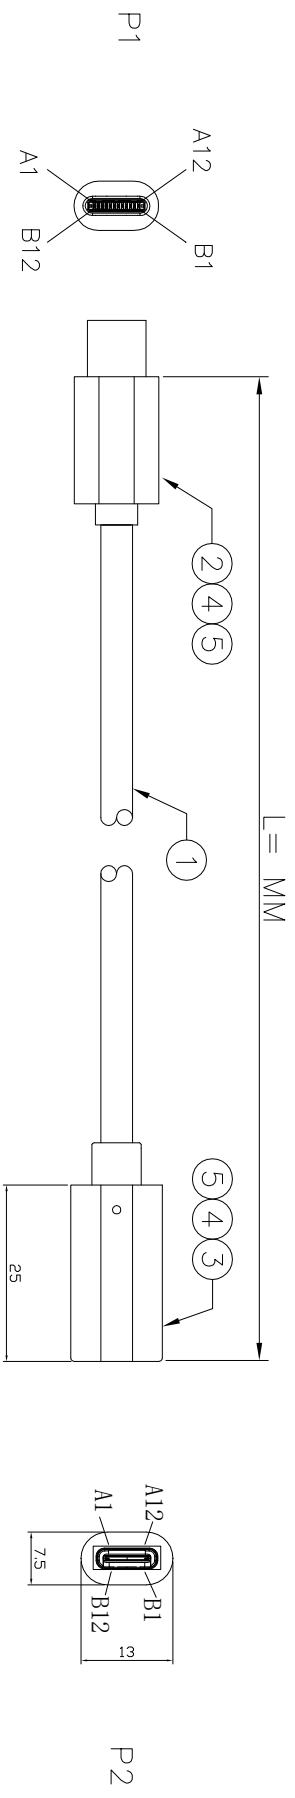

- NOTE:**
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

5	Over mold	PVC 50P BLACK	30G		
4	Inter mold	PE	10G		
3	CONN 2	TYPE-C Female color Black PIN/GF with PCBA	1PCS		
2	CONN 1	TYPE-C Male Color black PIN AU:G/F with PCBA	1PCS		
1	CABLE	UL2725(USB3.1) (1P#32+DAM)*4P+4C#32+1P#32+2C#22 +AEB OD:4.5MM BLACK	1PCS		
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	

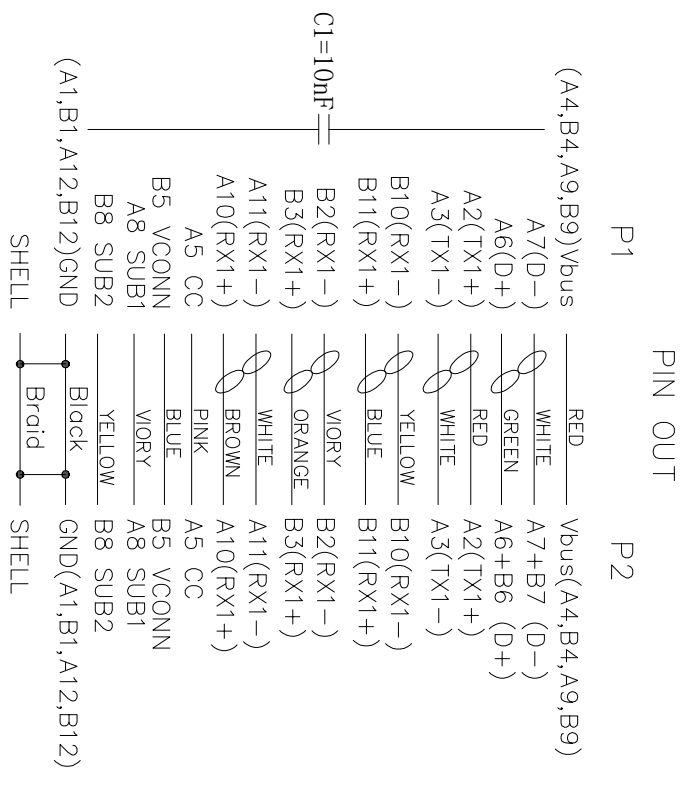

东莞市箐围电子有限公司

UNLESS OTHERWISE SPECIFIED	
TOLERANCE	: x.x ±
ANGLES	: .x ±
DRAWN:	
CHECKED:	
APPROVED:	
DESCRIPTION: USB Type-C M-F Adaptor Cable	
CUSTOMER P/N:	LKU31CMF30-X
PRODUCT NO.:	
DWG NO.:	20201022-02
REV:	X/0
UNIT:	mm
SHEET:	1 of 1
DATE:	20.12.02