


REV.	DESCRIPTION	DATE
△		
△		

RoHS

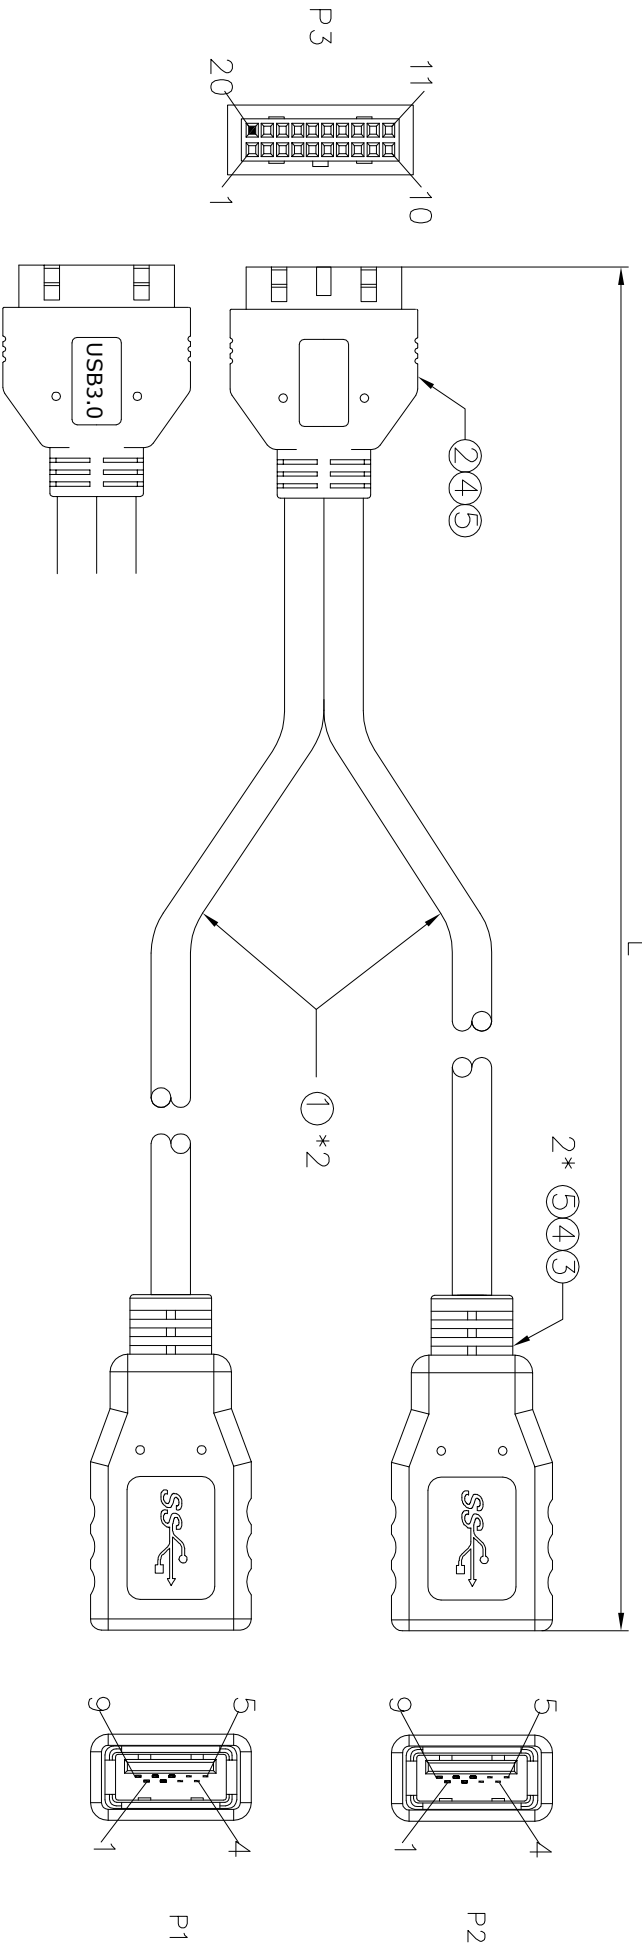

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

5	PVC 45P Black	15G		东莞市箐国电子有限公司 UNLESS OTHERWISE SPECIFIED TOLERANCE : x.x ± ; angles ± ; DESCRIPTION: 3.0 IDC 20P to USB 3.0 A-F x2pcs(全型) CUSTOMER P/N: PRODUCT NO.: DWG. NO: 20200514-17 REV: X/0 UNIT: mm DATE: 20.05.14 SCALE: NONE SHEET: 1 of 1			
4	PE	15G					
3	USB(3.0)A Female Color Blue Au G/F	2PCS					
2	USB(3.0) IDC 20P Color Blue,Au 1u”	1PCS					
1	UL20276 (USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD: 5.5MM BLUE/BLACK L: XX MM	2PCS					
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:		