
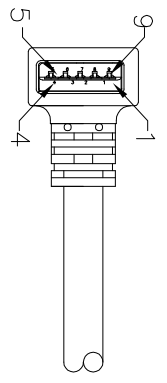
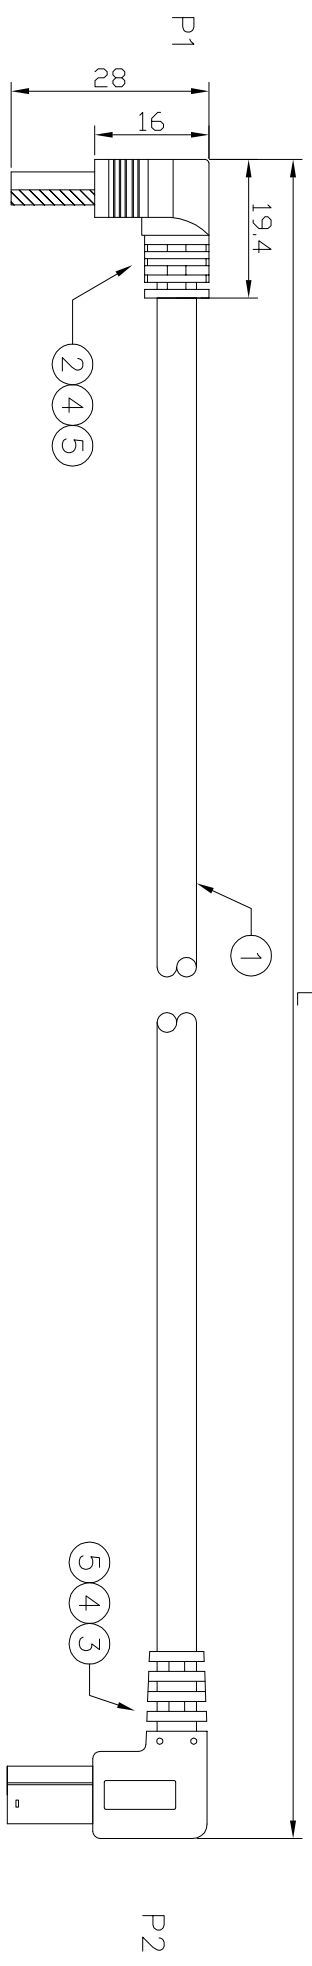
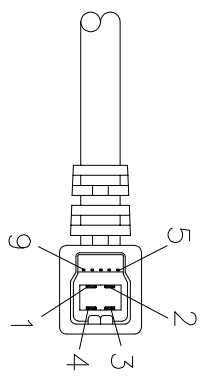


REV.	DESCRIPTION	DATE
△		
△		

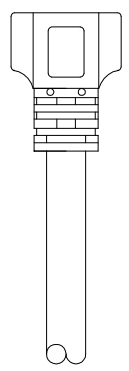

P1	1	RED	P2	1
	2	WHITE		2
	3	GREEN		3
	4	BLACK		4
	5	BLUE		5
	6	YELLOW		6
	7	DRAIN		7
	8	PURPLE		8
	9	ORANGE		9
		BRAID		9
		SHELL		9

- NOTE:**
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

5	PVC 50P Black	15G
4	PE	4G
3	USB(3.0) B TYPE Male Color Blue Au G/F	1PCS
2	USB(3.0) A TYPE Male Color Blue Au G/F	1PCS
1	UL20276(USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD: 5.5MM BLUE/BLACK L: xxxMM	1PCS
NO.	MATERIAL.P/N	Q'TY

<p>东莞市箐国电子有限公司</p>	
UNLESS OTHERWISE SPECIFIED TOLERANCE : x.x ± ; x.x ± ; angles ± ;	DESCRIPTION: USB 3.0 AM to BM R/A Type
DRAWN:	CUSTOMER P/N:
CHECKED:	PRODUCT NO.:
APPROVED:	DWG NO: 20200514-26
	REV: X/0
	UNIT: mm
	SCALE: NONE
	SHEET: 1 of 1
	DATE: 20.05.14