


REV.	DESCRIPTION	DATE
△		
△		

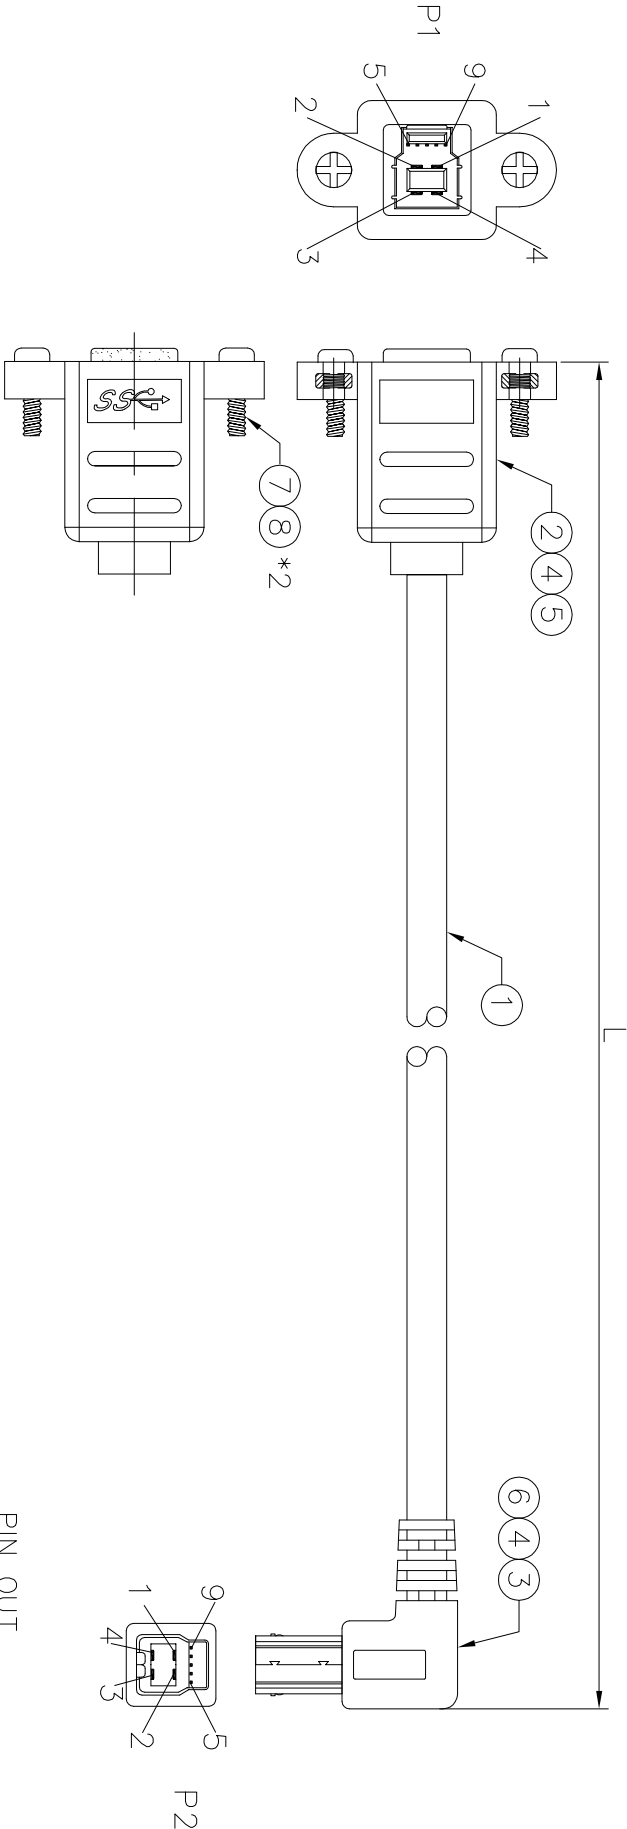

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

8	NUT 4.75*2MM #4-40UNC Plated Ni	2PCS	GXD001
7	SCREW 5*10MM #4-40UNC Plated Ni	2PCS	GXD001
6	PVC 45P Black/Blue	6G	
5	PVC 35P Black/Blue	4G	
4	PE料	4G	
3	USB(3.0) B TYPE Male Color Blue Au G/F	1SET	
2	USB(3.0) B TYPE Female Color Blue Au G/F	1PCS	
1	UL20276(USB3.0) (1P#28+AE)*2+2C#24+1P#28+AEB(AL) OD: 5.5MM BLACK/BLUE L: xx MM	1PCS	
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY

UNLESS OTHERWISE SPECIFIED			
TOLERANCE: xxx ± ; angles ± ;			
DRAWN: _____			
CHECKED: _____			
APPROVED: _____			
DESCRIPTION: USB 3.0 BM L Type to BF With Screw			
CUSTOMER P/N: _____			
PRODUCT NO.: _____			
DWG NO: 20200514-25			
REV: X/0			
UNIT: mm			
DATE: 20.05.14			
SCALE: NONE			
SHEET: 1 of 1			

东莞市箐国电子有限公司