
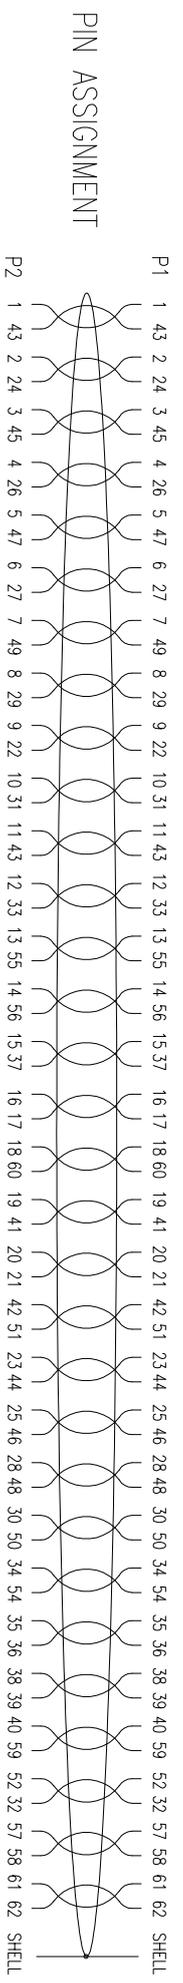


RoHS

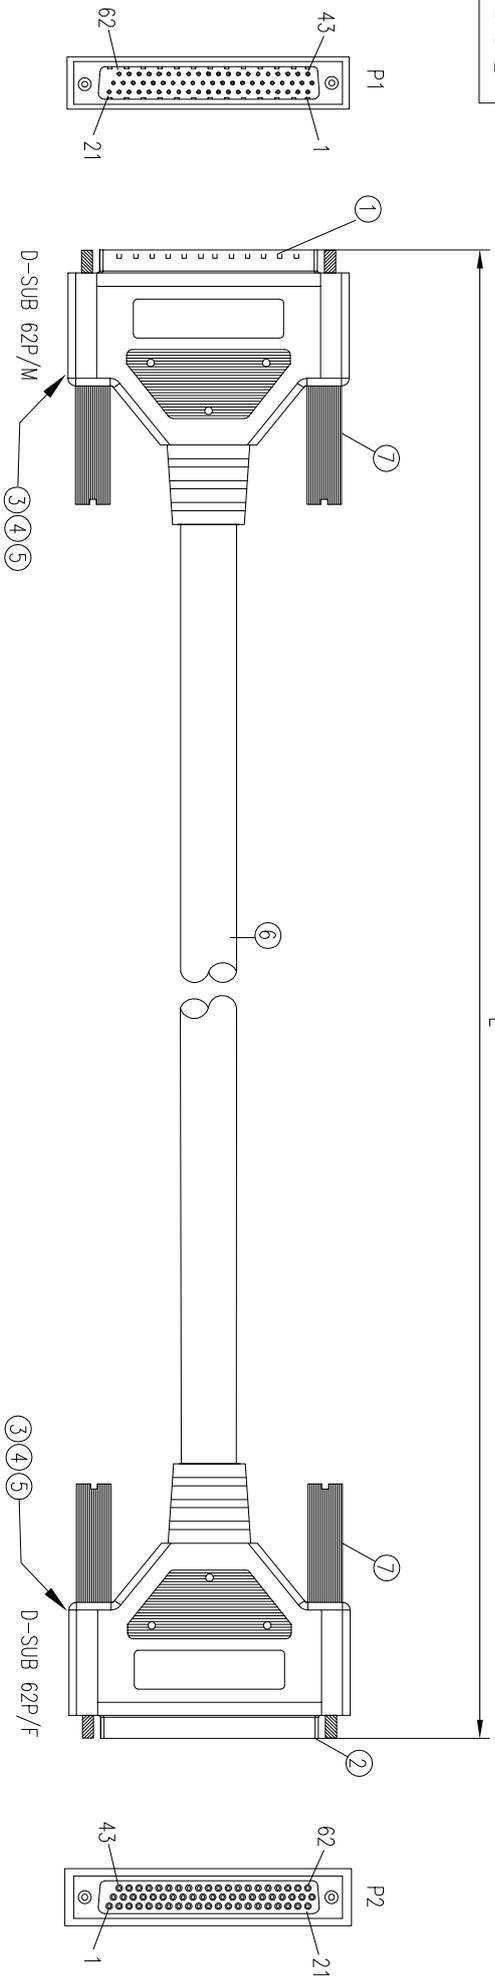

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NIK* E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*31P+AEB PVC JACKET COLOR:BLACK OD=10.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 62Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

QUALITY SYMBOLS		Tolerance		NAME: HD-D-SUB 62P Male To 62P Female (客户用图)		PART NO.		FC-HDB062MF-XXA	
□:	☒:	R±(MM)	△(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY
CRITICAL	MAJOR	300~2000	±100	SCALE:	NONE	DATE:	2015/09/02	Jack Chen	HP Guan
ZERO DEFECT	S.P.C	2001~5000	±200						
		5001~	±300						

东莞市箐国电子有限公司

QUALITY SYMBOLS		Tolerance		NAME: HD-D-SUB 62P Male To 62P Female (客户用图)		PART NO.		FC-HDB062MF-XXA	
□:	☒:	R±(MM)	△(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY
CRITICAL	MAJOR	300~2000	±100	SCALE:	NONE	DATE:	2015/09/02	Jack Chen	HP Guan
ZERO DEFECT	S.P.C	2001~5000	±200						
		5001~	±300						

8	DATE	2015/09/02	新版发行	Jack Chen	APPROVER	DESCRIPTION	7	6	5	4	3	2	1		
A	SIDE	8	DATE	2015/09/02	新版发行	Jack Chen	APPROVER	DESCRIPTION	7	6	5	4	3	2	1