



RoHS

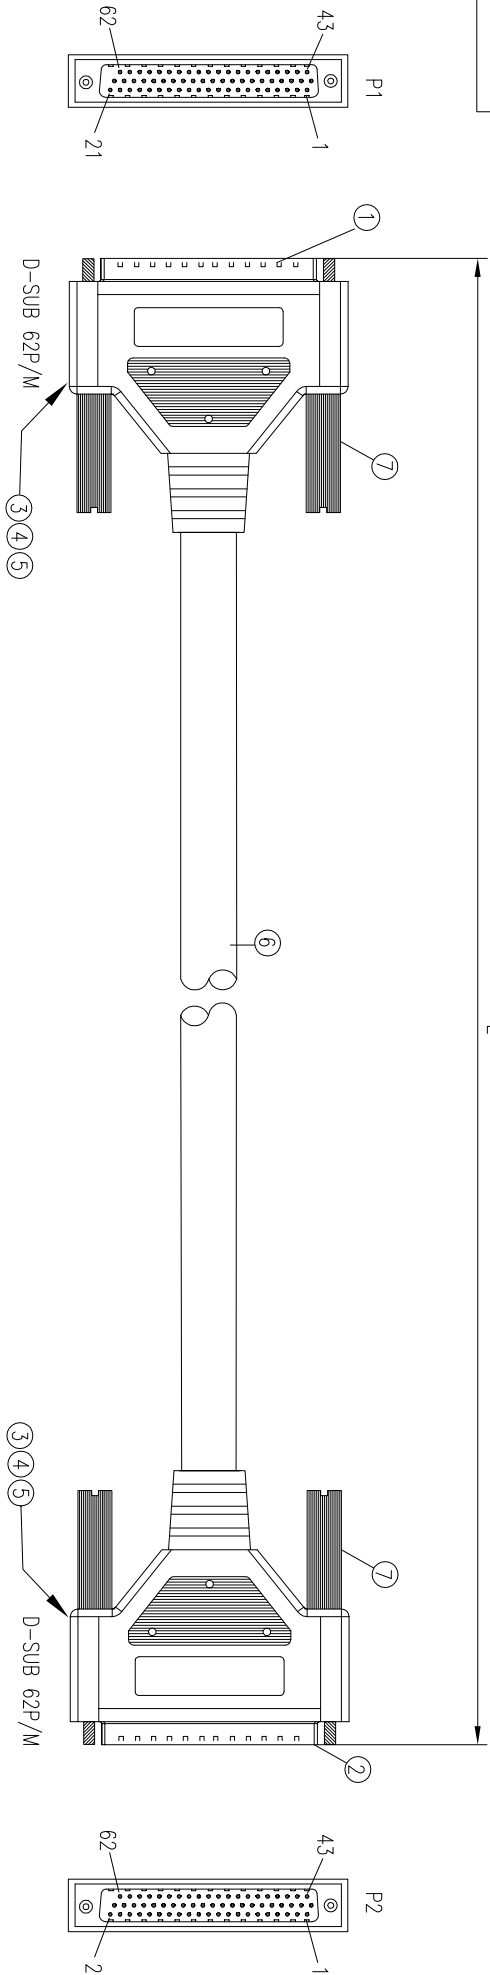

PIN ASSIGNMENT

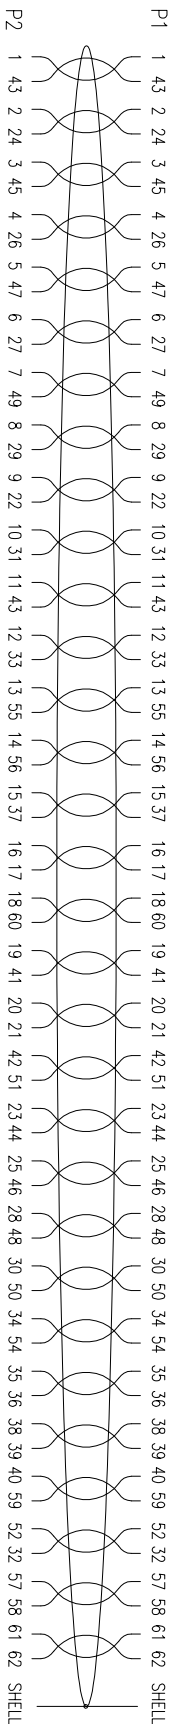

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NICK E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*31P+AEB PVC JACKET COLOR:BLACK OD=10.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

QUALITY SYMBOLS

□: MAJOR
 CRITICAL

▽: ZERO DEFECT
 S.P.C

Tolerance

R±(MM)	A±(MM)
300~2000	±100
2001~5000	±200
5001~	±300

NAME: HD-D-SUB 62P Male To 62P Male (客户用图) PART NO. FC-HDB062MM-XXA

REV: A UNIT: mm DRW BY: HP Guon APP BY: HP Guon

SCALE: NONE DATE: 2015/09/02 Jack Chen HP Guon

东莞市箐国电子有限公司

△		
△	2015/09/02	新版发行
△	2015/09/02	Jack Chen

8	DATE	7	DESCRIPTION	6	APPROVER	5	ZERO DEFECT	4	5001~	3	2015/09/02	2	HP Guon	1	A04-010
---	------	---	-------------	---	----------	---	-------------	---	-------	---	------------	---	---------	---	---------