


PIN ASSIGNMENT

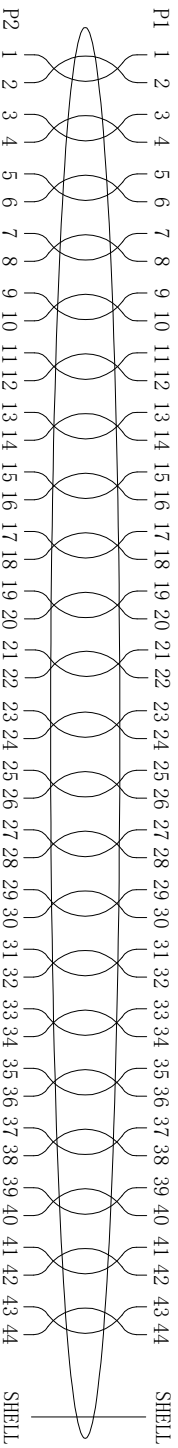

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NIK大 E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*25P+AEB PVC JACKET COLOR:BLACK OD=8.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 44Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 44Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

QUALITY SYMBOLS

□:
 ✕:
 CRITICAL MAJOR

▽:
 ZERO DEFECT S.P.C

Tolerance

R±(CM) Δ ±(CM)
 30~200 ±10
 201~500 ±20
 501~ ±30

NAME:

HD-D-SUB 44P Male To 44P Female (客户用图)
 Cable

REV:

A

UNIT:

mm

SCALE:

NONE

DATE:

2017/05/04

DRW BY:

Jack Chen

CHK BY:

HP Guon

PART NO.:

FC-HDB044MF--XXA

APP BY:

Jack Chen

DRAWING NO.:

A04-009

2017/05/04

新版发行

Jack Chen

APPROVER

DATE

DESCRIPTION

SIDE