

8

7

6

5


4

3


2

1

L

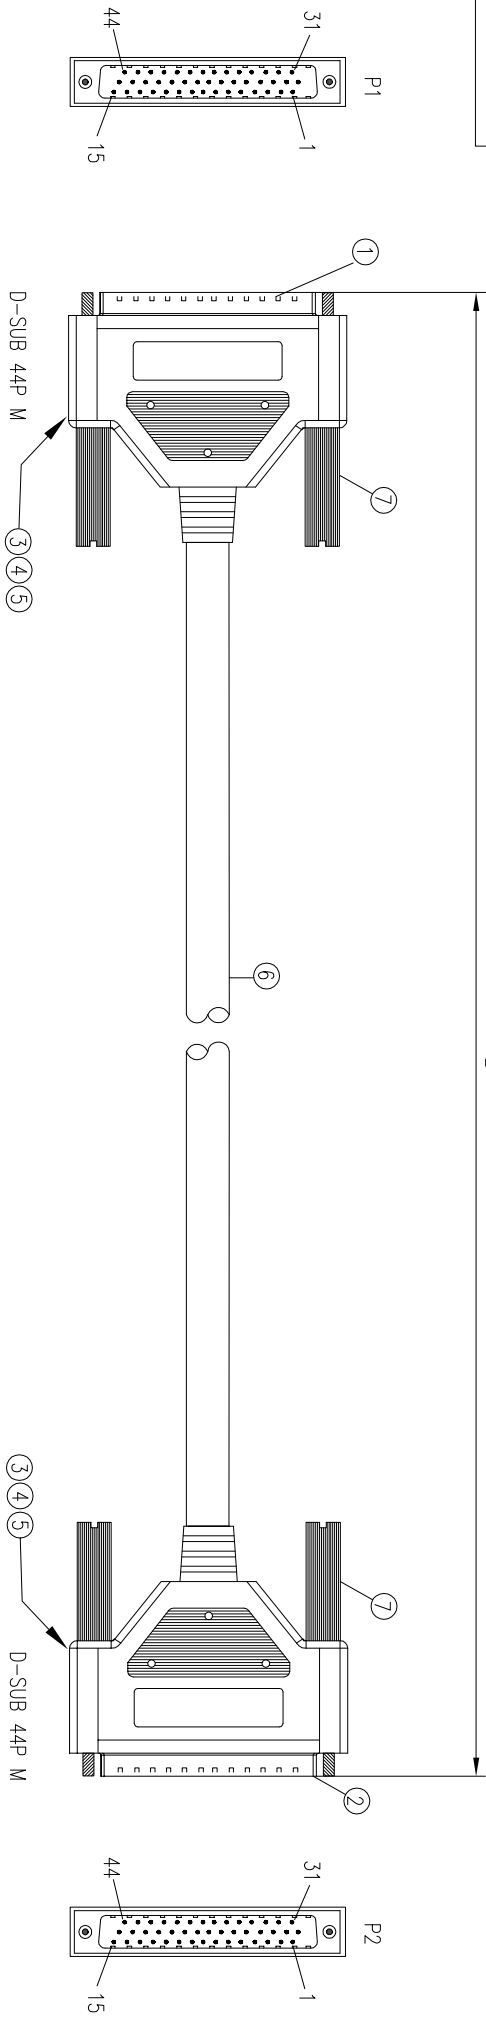

PIN ASSIGNMENT

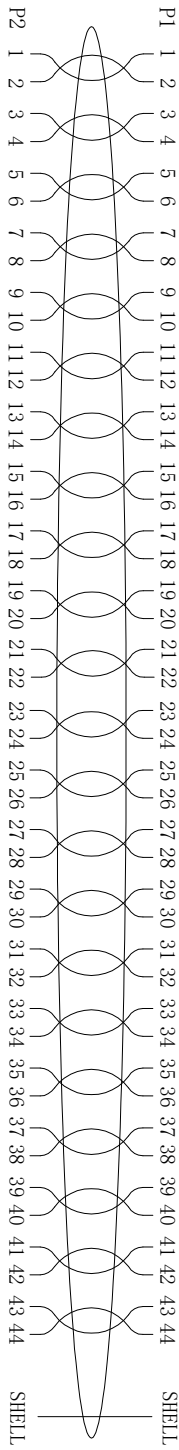

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NK(大 E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*25P+AEB PVC JACKET COLOR:BLACK OD=8.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 44P Pin Male Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 44P Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

QUALITY SYMBOLS

□ : :

CRITICAL MAJOR

ZERO DEFECT S.P.C

Tolerance

R±(CM) 公差(CM)

30~200 ±10

201~500 ±20

501~ ±30

NAME: HD-D-SUB 44P Male To 44P Male (客户用图) PART NO. FC-HDB044MM-XXA

REV: A UNIT: mm DRW BY: CHK BY: APP BY:

SCALE: NONE DATE: 2017/05/04 Jack Chen HP Guan

DRAWING NO. A04-007

东莞市箐国电子有限公司

△		
△	2017/05/04	新版发行
△	2017/05/04	新版发行

SIDE	DATE	DESCRIPTION	APPROVER
8			
7			
6			
5			
4			
3			
2			
1			