



ROHS

1±50MM

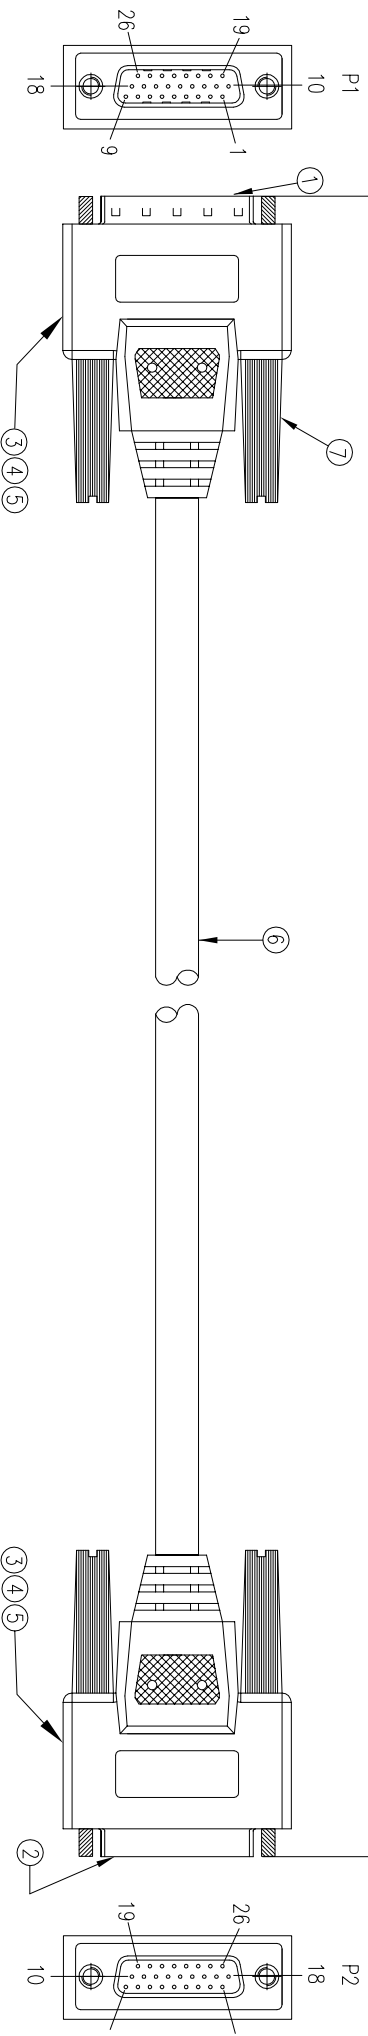

PIN ASSIGNMENT

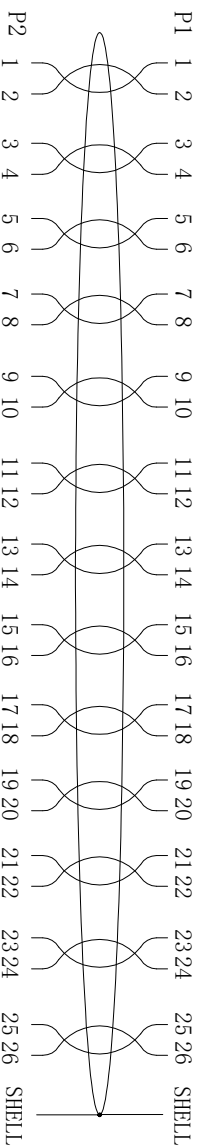

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NICK E33 BLACK	4PCS
6	CABLE	UL2919 28AWG*13P+AEB PVC JACKET COLOR:BLACK OD= 7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 26Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 26Pin Male Solder BLACK TYPE	1PCS

QUALITY SYMBOLS

□: MAJOR

△: CRITICAL

▽: ZERO DEFECT

Tolerance

X: ±0.50

.X: ±0.30

.XX: ±0.10

NAME: HD-SUB 26PIN M TO 26PIN F CABLE

REV: B

SCALE: NONE

DATE: 2014/08/12

UNIT: mm

DRW BY: KING ZHOU

CHK BY: DAW NHU

APP BY: KING ZHOU

PART NO. FC-HDB026MF-XXA

DESCRIPTION

QY'T

东莞市箐国电子有限公司

APPROVER

JANE ZHEN

DESCRIPTION

新版发行

DATE

2021/08/12

SIDE

8

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1