


ROHS


L±50MM

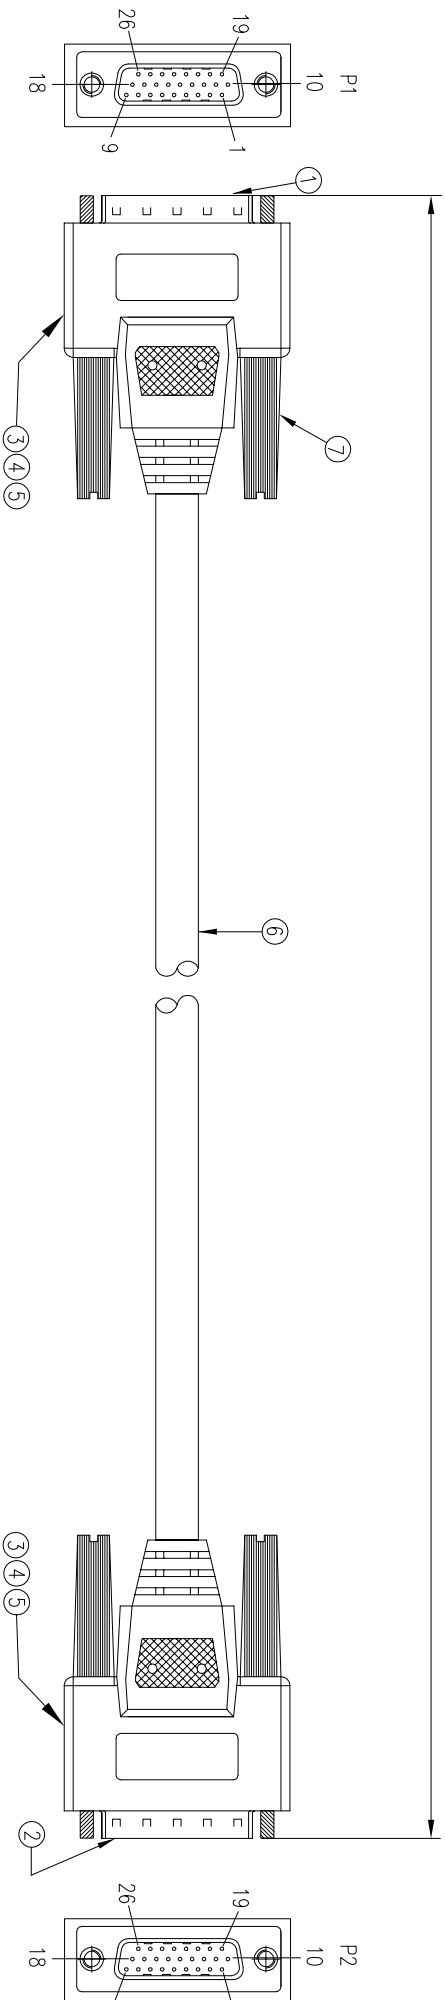

D-SUB 26P/M

D-SUB 26P/M

PIN ASSIGNMENT

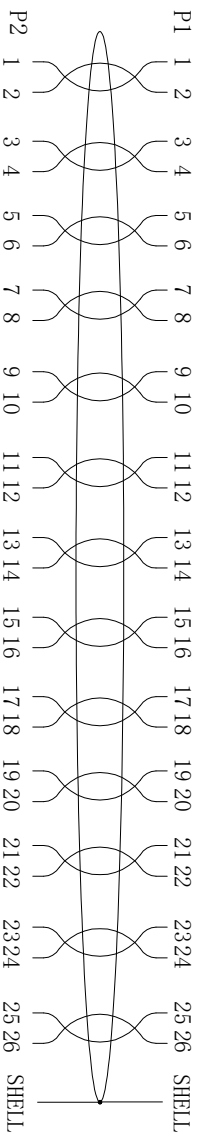

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# NICK E33 BLACK	4PCS
6	CABLE	UL2919 28AWG*13P+AEB PVC JACKET COLOR:BLACK OD= 7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 26Pin Male Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 26Pin Male Solder BLACK TYPE	1PCS

QUALITY SYMBOLS

□ : ☒ :
CRITICAL MAJOR

∇ : ∇ :
ZERO DEFECT S.P.C

Tolerance

x : ±0.50
.x : ±0.30
.xx : ±0.10



ITEM	PART NAME	DESCRIPTION	QTY
------	-----------	-------------	-----

NAME:	HD-SUB 26PIN M TO 26PIN M CABLE	PART NO.	FC-HDB026MM-XXA
-------	---------------------------------	----------	-----------------

REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
------	---	-------	----	--------	--------	--------	-------------

SCALE:	NONE	DATE:	2014/08/12	DAW NHU	KING ZHOU		
--------	------	-------	------------	---------	-----------	--	--

东莞市箜国电子有限公司

A		7		6		5		4		3		2		1	
△															
△															
△	2021/08/12	新版发行	JANE ZHEN												
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C										
8															