


PIN ASSIGNMENT

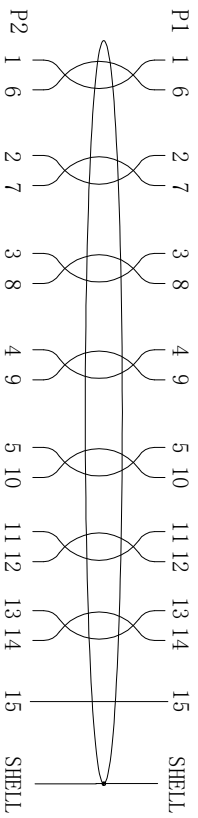

Part NO	LENGTH	REMARK
1 FC-HDB015MF-01A	L=500MM	±15MM
2 FC-HDB015MF-02A	L=1000MM	±30MM
3 FC-HDB015MF-03A	L=2000MM	±35MM
4 FC-HDB015MF-04A	L=3000MM	±50MM
5 FC-HDB015MF-05A	L=5000MM	±80MM

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN. DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QTY
6	CONNECTOR	H-D-SUB 15PIN FEMALE SOLDER TYPE	1 pcs
4	Dut-Mould	45P PVC BLACK	9
4	In-Mould	PE	9
3	SCREW	SCREW 4-40# BLACK NI	4PCS
2	CONNECTOR	H-D-SUB 15PIN MALE SOLDER TYPE	1 pcs
1	CABLE	UL2464 26AWG*7.5P PVC JACKET COLOR:BLACK OD= 6.5mm	1PCS

QUALITY SYMBOLS	UNIT	SCALE	TOLERANCES
CRITICAL	mm	2:1	DIM. ±0.10
MAJOR			ANGLE: ±1°

APPROVED	CHECKED	DESIGN	DRAWN	PART NO.	FC-HDB015MF-XXA	SHT	1/1

DESCRIPTION	H-D-SUB 15P Male to Female CABLE

REV	DESCRIPTION	DATE	ZERO DEFECT S.P.C.	东莞市箐国电子有限公司
A	图面发行	2021-03-08		