


• MATERIALS:(RoHS Compliant)

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

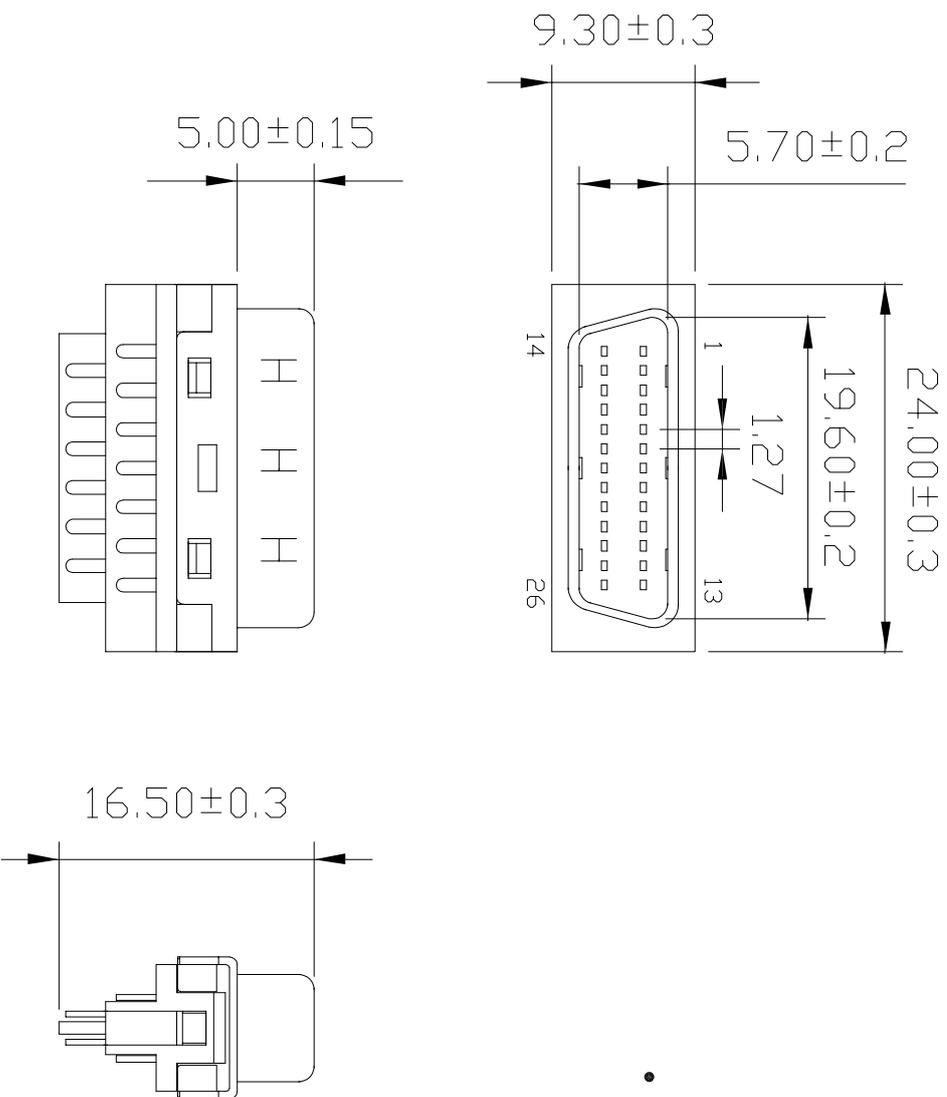


8		7		6		5		4		3		2		1																																																																																					
<p>• MATERIALS:(RoHS Compliant)</p> <p>Housing And Cover : Plastic thermoplastic P.B.T UL94V-0 black Contacts : Phosphor bronze gold selective plated Front Shell : Steel nickel plated over copper</p> <p>• ELECTRICAL CHARACTERISTICS</p> <p>Contact Current Rating: 1 Amp Dielectric Withstanding Voltage: 500V AC Insulation Resistance: 500MΩ/Min Contact Resistance: 35mΩ/Max Operation Temperature: -55°C ~ +105°C</p>																																																																																																			
A		B		C		D		E		F		F		A																																																																																					
<table border="1"> <tr> <td>△</td> <td></td> </tr> <tr> <td>△</td> <td></td> </tr> <tr> <td>△</td> <td>2015/07/16</td> <td>新版发行</td> <td>King Zhou</td> <td></td> </tr> </table>		△																△																△	2015/07/16	新版发行	King Zhou													<table border="1"> <tr> <td colspan="2">QUALITY SYMBOLS</td> <td colspan="2">Tolerance</td> </tr> <tr> <td>□ :</td> <td>MAJOR</td> <td>X :</td> <td>±0.50</td> </tr> <tr> <td>▽ :</td> <td>S.P.C</td> <td>X :</td> <td>±0.30</td> </tr> <tr> <td>▽ :</td> <td></td> <td>.xx</td> <td>±0.15</td> </tr> </table>		QUALITY SYMBOLS		Tolerance		□ :	MAJOR	X :	±0.50	▽ :	S.P.C	X :	±0.30	▽ :		.xx	±0.15	<table border="1"> <tr> <td colspan="2">NAME:</td> <td colspan="2">PART NO.</td> </tr> <tr> <td colspan="2">SCSI-II 26P Male Solder Type For Cable</td> <td colspan="2">B02-026311E0-01</td> </tr> <tr> <td>REV:</td> <td>UNIT:</td> <td>DRW BY</td> <td>CHK BY</td> </tr> <tr> <td>A</td> <td>mm</td> <td></td> <td></td> </tr> <tr> <td>SCALE:</td> <td>DATE:</td> <td>DAW NHU</td> <td>KING ZHOU</td> </tr> <tr> <td>N:1</td> <td>2015/07/16</td> <td></td> <td></td> </tr> </table>		NAME:		PART NO.		SCSI-II 26P Male Solder Type For Cable		B02-026311E0-01		REV:	UNIT:	DRW BY	CHK BY	A	mm			SCALE:	DATE:	DAW NHU	KING ZHOU	N:1	2015/07/16			<table border="1"> <tr> <td colspan="2">DRAWING NO.</td> </tr> <tr> <td colspan="2">MDD-005</td> </tr> </table>		DRAWING NO.		MDD-005	
△																																																																																																			
△																																																																																																			
△	2015/07/16	新版发行	King Zhou																																																																																																
QUALITY SYMBOLS		Tolerance																																																																																																	
□ :	MAJOR	X :	±0.50																																																																																																
▽ :	S.P.C	X :	±0.30																																																																																																
▽ :		.xx	±0.15																																																																																																
NAME:		PART NO.																																																																																																	
SCSI-II 26P Male Solder Type For Cable		B02-026311E0-01																																																																																																	
REV:	UNIT:	DRW BY	CHK BY																																																																																																
A	mm																																																																																																		
SCALE:	DATE:	DAW NHU	KING ZHOU																																																																																																
N:1	2015/07/16																																																																																																		
DRAWING NO.																																																																																																			
MDD-005																																																																																																			
A		B		C		D		E		F		F		A																																																																																					
8		7		6		5		4		3		2		1																																																																																					
SIDE		DESCRIPTION		APPROVER		ZERO DEFECT		DATE		DATE		DATE		DATE																																																																																					
8		7		6		5		4		3		2		1																																																																																					


东莞市箐国电子有限公司

• MATERIALS:(RoHS Compliant)






Hood: Plastic Thermoplastic ABS UL 94V-0
 Jackscrews: Steel Nickel Plated Over Copper
 Jackscrews Hood: PVC
 Inner Shell: Steel Nickel Plated Over Copper



Entry Hole

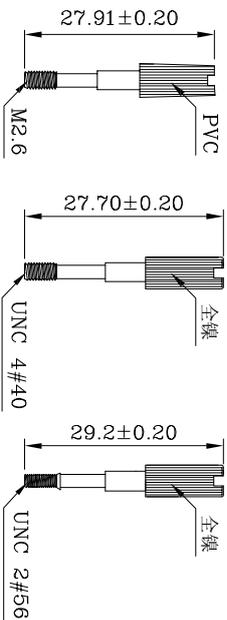

MPS 26 K 8 3

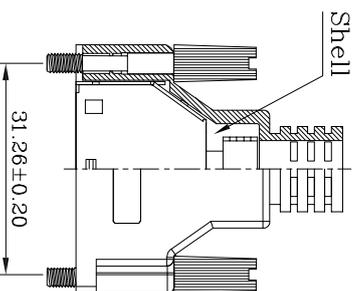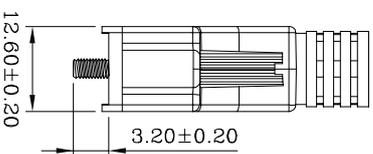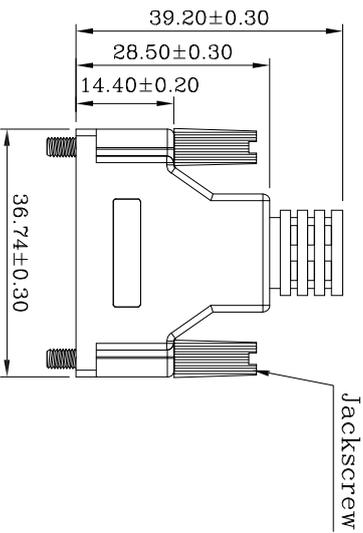

CONTACT TYPES: _____
 26Pos Straight Exit (Hood Type)
 HOOD COLORS: _____
 K= Black
 ES= Especial
 ENTRY HOLE SIZES: _____
 7= $\phi 7.0$
 8= $\phi 8.0$
 8A= $\phi 8.5$
 CONTACT FINISHES: _____
 1= #2-56
 2= #4-40
 3= M2.6

△			
△	2017-2-20	根据实物修改公差	JANE ZHEN
△	2009-7-20	图面发行	JANE ZHEN
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	CRITICAL	X :	±0.50
⊠ :	MAJOR	.X :	±0.30
▽ :	ZERO DEFECT	.XX :	±0.10
S.P.C			

NAME:	SCSI 26P ABS Hood With Screw			PART NO.	MPS26PXXX
REV:	B	UNIT:	mm	DRW BY	DAW NHU
SCALE:	NONE	DATE:	2017/02/20	CHK BY	KING ZHOU
东莞市箐国电子有限公司				APP BY	
				DRAWING NO.	