
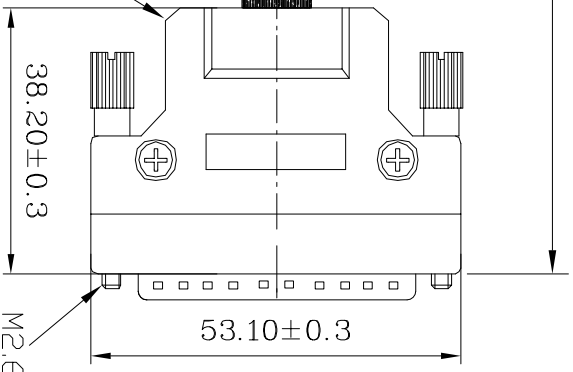
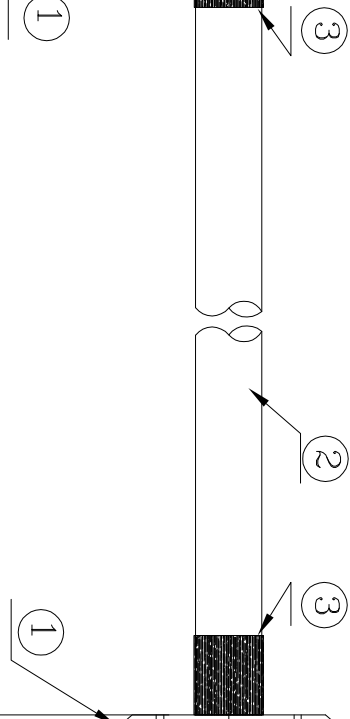
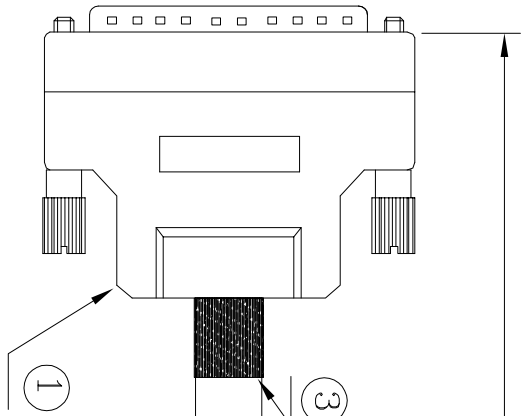


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

ROHS


P1

#25 #50

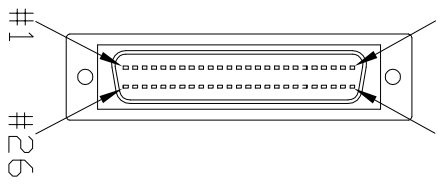

P2

#25 #50

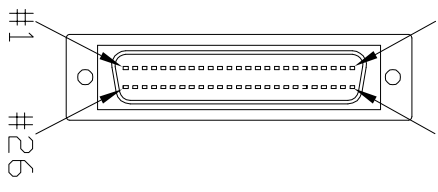

L= mm

PIN ASSIGNMENT

P1	SIGNAL	P2	P1	SIGNAL	P2
1	OPC1	1	26	SI3	26
2	OPC2	2	27	SI4	27
3	PULS1	3	28	SI5	28
4	PULS2	4	29	SI6	29
5	SIGN1	5	30	SI7	30
6	SIGN2	6	31	SI8	31
7	COM+	7	32	SI9	32
8	COM-	8	33	SI10	33
9	SI2	9	34	SO2-	34
10	SO1-	10	35	SO2+	35
11	SO1+	11	36	SO3-	36
12	SO5	12	37	SO3+	37
13	GND	13	38	SO4-	38
14	SPR/SPL	14	39	SO4+	39
15	GND	15	40	SO6	40
16	P-ATL/TRQR	16	41	SI1	41
17	GND	17	42	IM	42
18	N-ATL	18	43	SP	43
19	CZ	19	44	PULSH1	44
20	NC	20	45	PULSH2	45
21	OA+	21	46	SIGNH1	46
22	OA-	22	47	SIGNH2	47
23	OZ+	23	48	OB+	48
24	OZ-	24	49	OB-	49
25	GND	25	50	FG	50
			SHELL	GND	SHELL

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

Part NO	LENGTH	REMARK
1	FC-DB50-01S L=1000MM	
2	FC-DB50-02S L=2000MM	
3	FC-DB50-03S L=3000MM	
4	FC-DB50-04S L=5000MM	

ITEM	PART NAME	DESCRIPTION	QTY/T
1	CONNECTOR	HPDB SCSI 50Pin Male CONNECTOR ASSY TYPE	2SET
2	CABLE	UL20276 28AWG*25P+ABD PVC JACKET COLOR:BLACK OD= 8.6mm	1PCS
3	TUBE	Heat-shrink tube Black DD=10.0MM L=15MM	2PCS

QUALITY SYMBOLS	UNIT	SCALE	TOLERANCES
CRITICAL	mm	2:1	DIM. ±0.10
MAJOR			ANGLE: ±1°

东莞市箜国电子有限公司

REV	DESCRIPTION	DATE	ZERO DEFECT S.P.C
A	圖面發行	2021-05-22	

8 7 6 5 4 3 2 1