

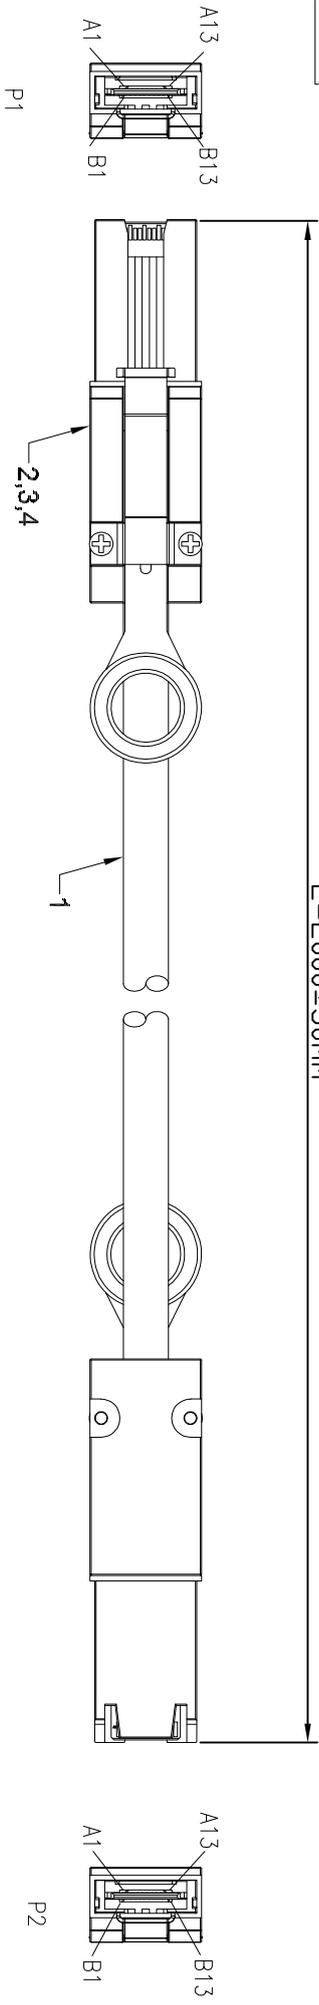


L=2000±30MM



PIN ASSIGNMENT:

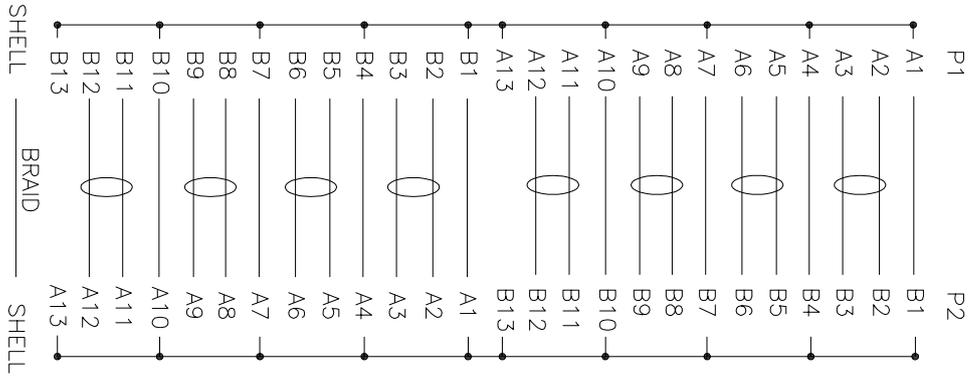

5	Sheath	Black, soft rubber protective sheath	2	PCS
4	Molded	PE transparent internal die	A/R	8
3	PCB	4 Layer, T=1.0MM, FR4, Gold-plated 30u, characteristic impedance 100 ohm	2	PCS
2	组件	SPP-8088合金组件(拉环,卡钩,密封胶,螺钉)	2	SET
1	线材	Mini SAS cable:28AWGx2C+2drain+al.mylay+amy1ay印字,OD7.5,6G6	A/R	M
NO.1	名称	描述	Q'TY	UNITS
A	INITIAL RELEASE			
REV	DESCRIPTION OF CHANGE			DATE

TOLERANCE		M/M	
INCHES			
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	MJQJ	SCALE	NONE
CHECK BY		UNIT	MM
APPD BY		SHEET	1/1
		DATE	2020/01/03
		DWG NO.:	A00508A
		TITLE:	MINI SAS 8088-8088L=2M

ELECTRICAL CHARACTER:

- a, 100% OPEN & SHORT TESTING
- b, WITH STANDING VOLTAGE: DC 300V 0.01Sec
- c, INSULATION RESISTANCE:5 M Ohm(Min)
- d, CONDUCTIVE RESISTANCE:2 Ohm(Max)

东莞市箐国电子有限公司	
LINECONN ASIA LIMITED.	
P/N:	CUSTOMER P/N: