


- Current Rating: 0.5 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

No. of Pin	DIMENSIONS				
	A	B	C	D	E
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.50	78.12	62.23	71.32	66.10

B02-XXX811EC-JX

Contact Finishes:
 050 = 50PIn
 068 = 68PIn
 100 = 100PIn

1=R1 Type
 2=R2 Type

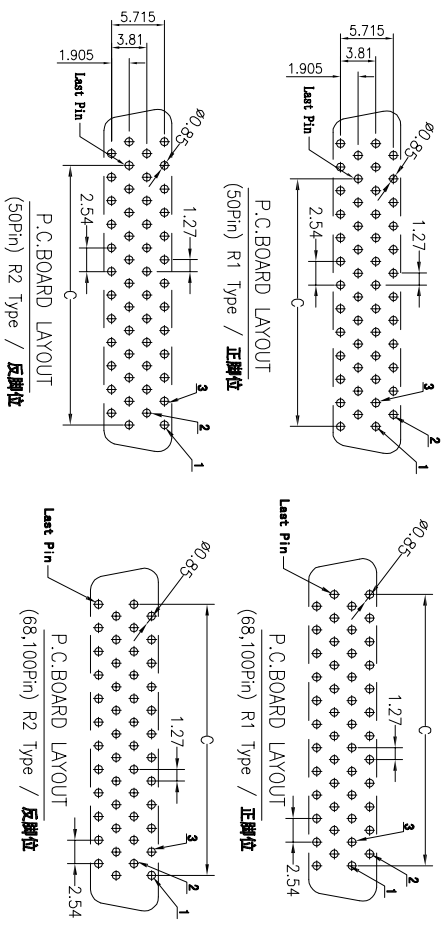

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	ZINC ALLOY	PLATING:NI	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:NI	

QUALITY SYMBOLS

□ :
 ☒ :
 △ :
 ▽ :

Tolerance

X: ±0.50
 .X: ±0.30
 .XX: ±0.25

NAME:	SCSI-II 100P Female V/T Type For PCB				PART NO.:	B02-XXX811EC-JX	
REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.:
SCALE:	N:1	DATE:	2011/10/19	JINGLI	KING ZHOU		B02-036

东莞市箐国电子有限公司

A	2011/10/19	NEW ISSUE	JINGLI	ZERO DEFECT	S.P.C
SIDE	DATE	DESCRIPTION	APPROVER		

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---