
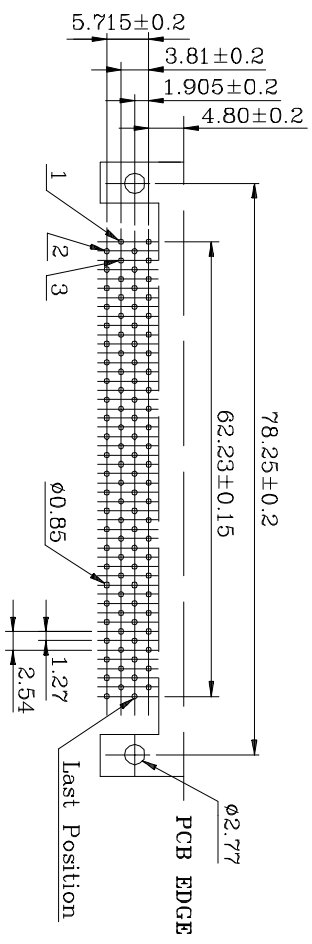

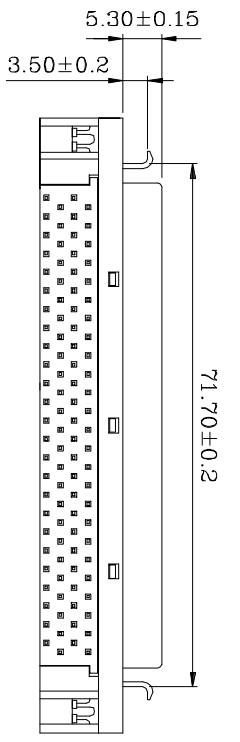


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

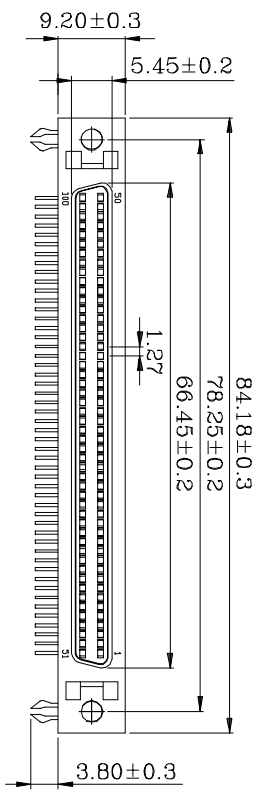

PCB Layout (B)

| | | | | |
|---|-----------|-----------------|--|--|
| 6 | BOARDLOCK | COPPER ALLOY | PLATING: Tin | |
| 5 | BRACKET | SPCC | PLATING: Ni | |
| 4 | COVER | PBT+30%GF | COLOR: BLACK | |
| 3 | HOUSING | PBT+30%GF | COLOR: BLACK | |
| 2 | SHELL | SPCC | PLATING: Ni | |
| 1 | TERMINAL | PHOSPHOR BRONZE | CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni | |

QUALITY SYMBOLS

Tolerance

NAME: SCST-II 100Pin Female R/A DIP Type
PART NO. B02-100611EC-2S

CRITICAL

MAJOR

REV: A
UNIT: mm
DRW BY: KING ZHOU
CHK BY: APP BY: B02-014

ZERO DEFECT S.P.C

XX

SCALE: N:1
DATE: 2008/06/11
JINGLI
KING ZHOU

APPROVER

JINGLI

DESCRIPTION: NEW ISSUE

DATE

2008/06/11

SIDE: 8

东莞市箐国电子有限公司