

No. of Contact	A ±0.25	B ±0.13	C ±0.38	D ±0.25
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	36.33	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71


Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Contact Resistance: 30 mΩ Max.
 Insulation Resistance: 5000MΩ Min.
 Temperature Range: -55°C to +85°C

PART NO.: B05-OXX4X14N-02

NO. OF CONTACT: 1

09: 9P
 15: 15P
 25: 25P
 37: 37P

HOUSING COLOR:
 1 = BLACK
 5 = WHITE

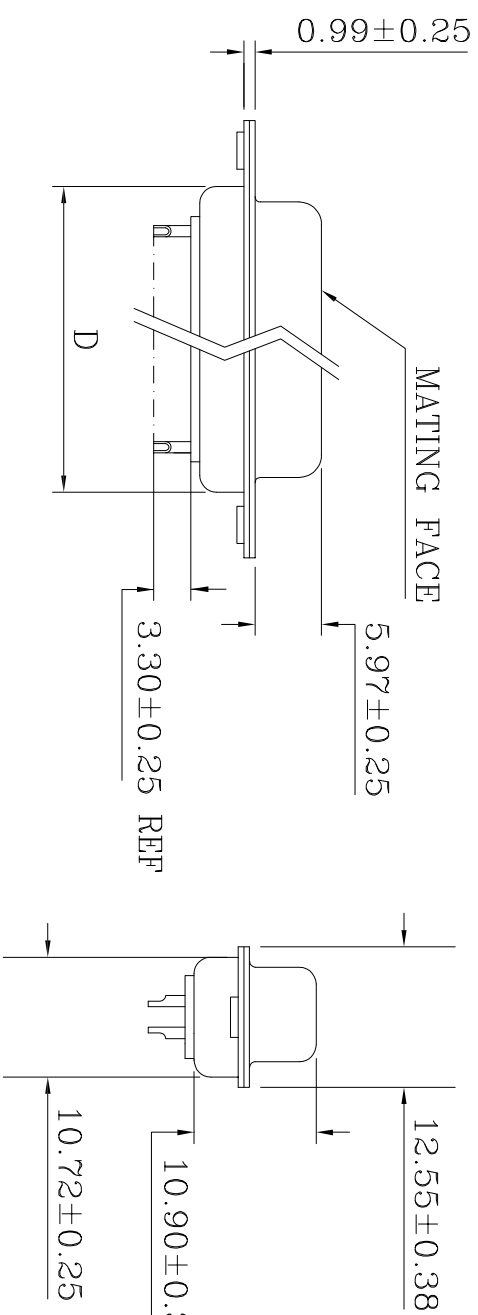

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	HOUSING	PBT+30%GF	COLOR: SEE NOTE	
3	BACK SHELL	STEEL	PLATING: TIN	
2	FRONT SHELL	STEEL	PLATING: NI	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2μ"	

QUALITY SYMBOLS

Tolerance

NAME: D-SUB MACHINE PIN FEMALE SOLDER TYPE PART NO. B05-OXX4X14N-02

CRITICAL MAJOR ZERO DEFECT S.P.C

Scale: X, .xx

REV: A UNIT: mm DRW BY: CHK BY: APP BY: DRAWING NO. AL6-004

DATE	DESCRIPTION	APPROVER
2010/08/19	新版发行	King Zhou

东莞市箐国电子有限公司