
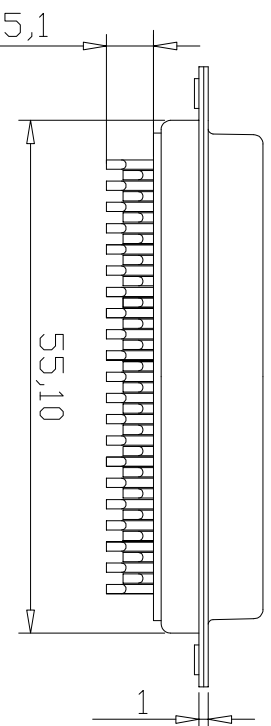
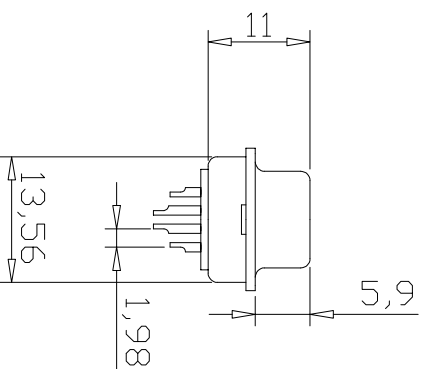


Voltage Current Rating: 3 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 1000M Ω Min.
 Temperature Range: -45°C to +85°C

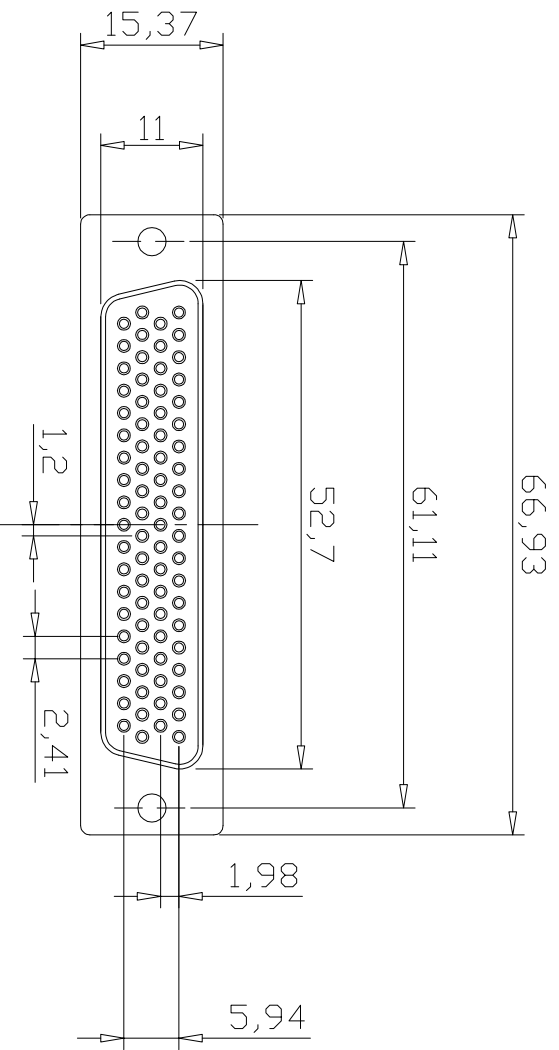

PART NO: B04-0784X14N-02
 HOUSING COLOR: 1 = BLACK
 5 = WHITE

4	REAR SHELL	SPCC	PALTING: Sn
3	FRONT SHELL	SPCC	PALTING: Ni
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.
1	TERMINAL	COPPER ALLOY	CONTACT AREA: AU 2U" SOLDER AREA: AU G/F

ITEM	DESC.	MATERIAL	REMARKS
------	-------	----------	---------

QUALITY SYMBOLS

□ : MAJOR

⊠ : CRITICAL

∇ : ZERO DEFECT S.P.C

Tolerance

x. ±0.50

.x ±0.30

.xx ±0.25

NAME: HD-D-SUB 78P母头焊线式(车针)

REV: A UNIT: mm

SCALE: N:1 DATE: 2010/06/03

DRW BY: JINGLI CHK BY: KING ZHOU

PART NO. B04-0784X14N-02

APP BY

DRAWING NO. B04-009

PART REMARKS

东莞市箐国电子有限公司

APPROVER

JINGLI

DESCRIPTION

NEW ISSUE

DATE

2010/06/03

SIDE

8