



Voltage Current Rating: 3 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 1000M Ω Min.
 Temperature Range: -45°C to +85°C

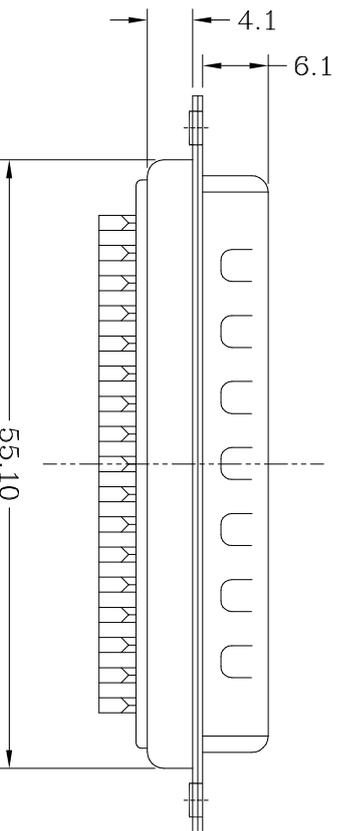

PART NO:

B04-0503X14N-02

HOUSING COLOR:

- 1 = BLACK
- 5 = WHITE

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PEI+30%GF	COLOR: SEE PART NO.	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F	
ITEM	DESC.	MATERIAL	SOLDER AREA: Sn	REMARKS

NAME: D-SUB 50P 公头焊线式 (车针) PART NO. B04-0503X14N-02

REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.
SCALE:	N:1	DATE:	2012/08/12	DAMN HU	KING ZHOU		AD1-002

QUALITY SYMBOLS

□: CRITICAL

MAJOR

MAJOR

MAJOR

MAJOR

Tolerance

X: ±0.50

X: ±0.30

.XX: ±0.25



东莞市箐围电子有限公司

8 7 6 5 4 3 2 1

A SIDE DATE 2012/08/12 新版发行

8 7 6 5 4 3 2 1

DESCRIPTION APPROVER King Zhou

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1