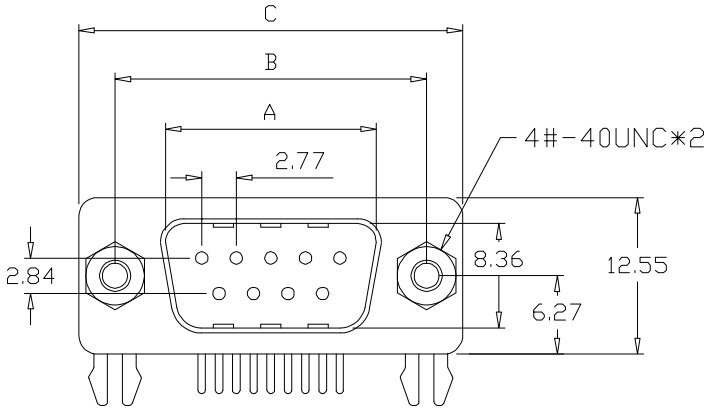

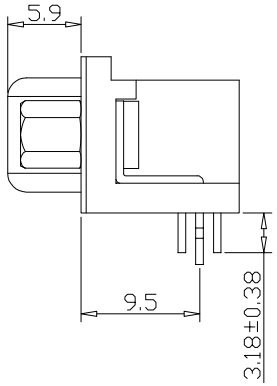

Voltage Current Rating:3 AMP.
Dielectric Withstanding Voltage:1000V AC
Contact Resistance:15 mΩ Max.
Insulation Resistance:1000MΩ Min.
Temperature Range:-45℃ to +85℃

PART NO.:

B05-0XX5X1AD-F5

NO.OF CONTACT:
09: 9P
15: 15P
25: 25P
37: 37P

HOUSING COLOR:
1= BLACK
2= BLUE
3= ORANGE

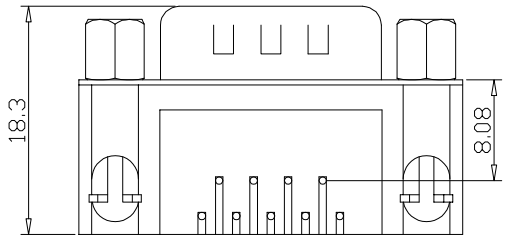

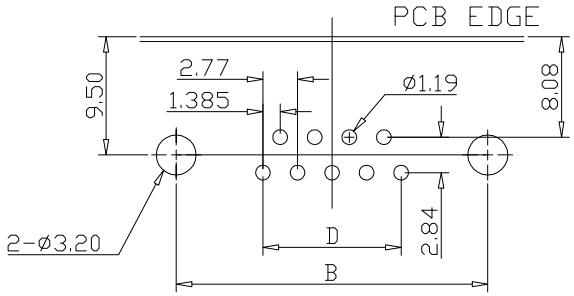



SHELL SIZE	Dim A± 0.20	Dim B± 0.25	Dim C± 0.38	Dim D
09 pin	16.92	24.99	30.80	11.08
15 pin	25.25	33.32	39.10	19.39
25 pin	38.96	47.04	53.00	33.24
37 pin	55.42	63.50	69.32	49.86

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
6	SCREW	STEEL	PLATING;Ni	
5	BOARD LOCK	STEEL	PLATING;Ni	
4	COVER	PBT+30%GF UL 94V-0	COLOR:BLACK	
3	HOUSING	PBT+30%GF UL 94V-0	COLOR:BLACK	
2	SHELL	STEEL	PLATING;Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:G/F UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
3			
2	2011/11/16	增加37PIN规格	King Zhou
1	2007/06/22	新版发行	Fei Chen

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Toleance	
x.	±0.50
.x	±0.30
.xx	±0.15

NAME:	D-SUB MALE 90° DIP FOOTPRINT 8.08mm (客户用图)				PART NO.	B05-0XX5X1AD-F5	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2007/06/22	DAW NHU	KING ZHOU		AL7-009

东莞市箐国电子有限公司