

Voltage Current Rating: 3 AMP.  
 Dielectric Withstanding Voltage: 1000V AC  
 Contact Resistance: 15 mΩ Max.  
 Insulation Resistance: 1000M Ω Min.  
 Temperature Range: -45°C to +85°C

PART NO.:



B04-0XX5X1AD-F4

NO. OF CONTACT:

09: 9P  
 15: 15P  
 25: 25P  
 37: 37P

HOUSING COLOR:

1= BLACK  
 2= BLUE  
 3= ORANGE

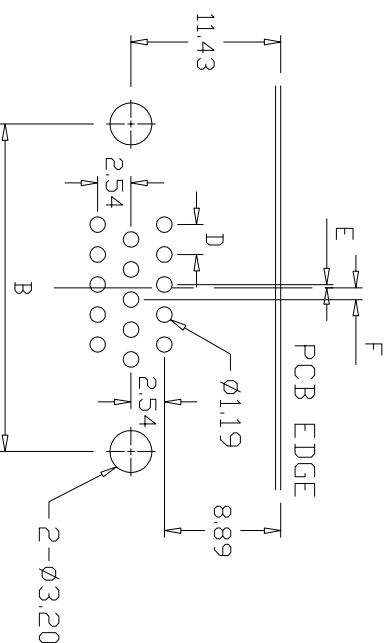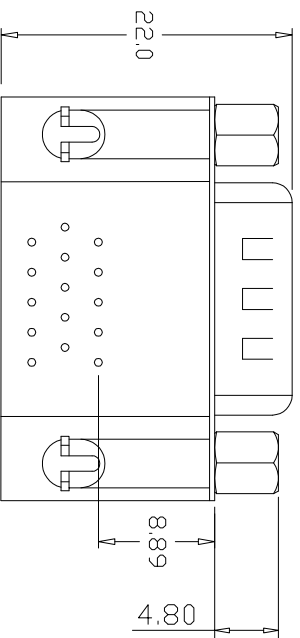


No. of contact	Dim A ± 0.20	Dim B± 0.25	Dim C± 0.38	Dim D	Dim E	Dim F
15 pin	16.92	24.99	30.80	2.29	0.25	0.89
26 pin	25.25	33.32	39.10	2.29	0.51	0.64
44 pin	38.96	47.04	53.00	2.29	0.51	0.64
62 pin	55.42	63.50	69.32	2.41	0.58	0.62

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
6	RIVET	COPPER ALLOY	PLATING: NI	
5	SCREW	STEEL	PLATING: NI	
4	BOARD LOCK	COPPER ALLOY	PLATING: NI	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: NI	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: SEE NOTE SOLDER AREA: Sn UNDER-PLATING: NI	

QUALITY SYMBOLS

□: Tolerance  
 ☒: CRITICAL MAJOR  
 ▽: ZERO DEFECT S.P.C

X: ±0.50  
 .X: ±0.30  
 .XX: ±0.25



DATE	DESCRIPTION	APPROVER
2015/07/30	新版发行	King Zhou

DATE	DESCRIPTION	APPROVER
2015/07/30	新版发行	King Zhou

NAME:	HD, D-SUB MALE 90度DIP FOOTPRINT	PART NO.	B04-0XX5X1AD-F4
REV:	A	DRW BY	DAWN HU
SCALE:	N:1	DATE:	2015/07/30

东莞市箐国电子有限公司