


No. of Contact	A	B	C	D
15	16.3	25.0	30.8	19.3
26	24.6	33.3	39.1	27.5
44	38.3	47.0	53.0	41.3
62	54.8	63.5	69.3	57.7

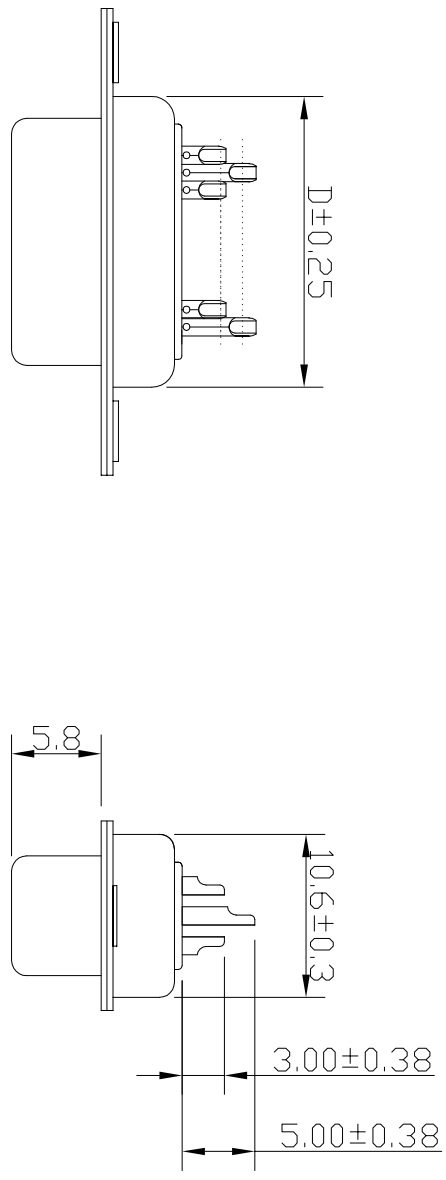

Voltage Current Rating:5 AMP.  
 Dielectric Withstanding Voltage:1000V AC  
 Insulation Resistance:1000M $\Omega$  Min.  
 Temperature Range:-25 $^{\circ}$ C to +85 $^{\circ}$ C

PART NO: B04-0XX4X1AN-01

NO.OF CONTACT:

- 15 = 15 pos
- 26 = 26 pos
- 44 = 44 pos
- 62 = 62 pos

HOUSING COLOR:

- 1 = BLACK
- 5 = WHITE
- 6 = BLUE

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
4	REAR SHELL	SPCC	PALTING:Sn	
3	FRONT SHELL	SPCC	PALTING:NI	
2	HOUSING	PBT+30%GF	COLOR:SEE PART NO.	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:Sn	

QUALITY SYMBOLS		Tolerance		NAME:	HD.D-SUB	传统母头焊线式通孔	PART NO.	B04-0XX4X1AN-01	DRAWING NO.
<input type="checkbox"/> :	CRITICAL	x.	$\pm 0.50$	REV:	A	UNIT:	mm	DRW BY	KING ZHOU
<input type="checkbox"/> :	MAJOR	.x	$\pm 0.30$	SCALE:	N:1	DATE:	2007/10/16	CHK BY	
<input type="checkbox"/> :	ZERO DEFECT	.xx	$\pm 0.25$					APP BY	
	S.P.C								B04-005

SIDE	DATE	DESCRIPTION	APPROVER
$\Delta$	2007/10/16	NEW ISSUE	JINGLI

东莞市箐国电子有限公司