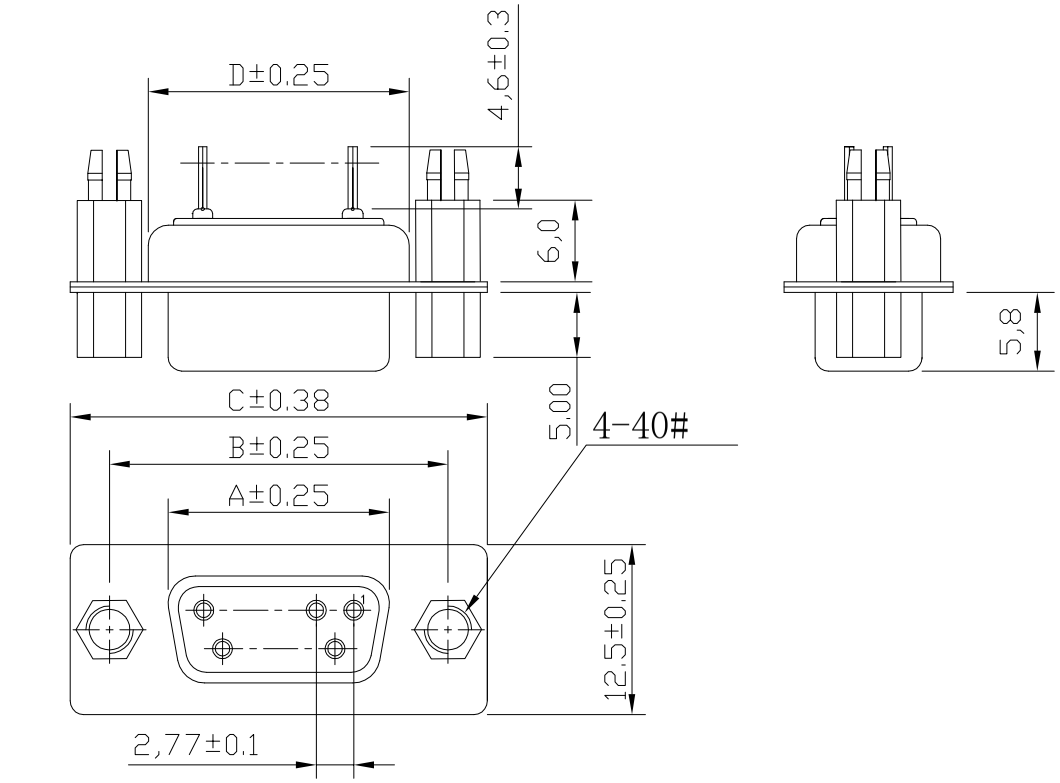

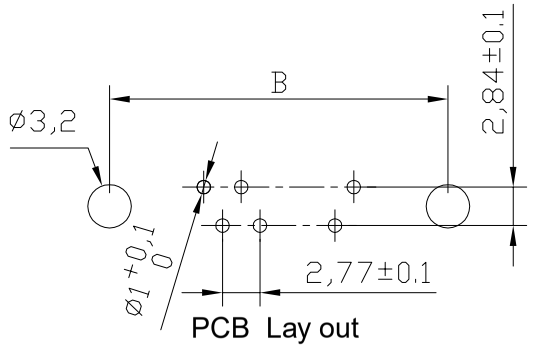

No.of Contact	A	B	C	D
09	16.2	25.0	30.8	19.0
15	24.8	33.3	39.2	27.7
25	38.3	47.0	53.0	41.0
37	54.8	63.5	69.4	57.3

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:−25℃ to +85℃

PART NO:

B05−0XX8X1AD−E5

NO.OF CONTACT:
09 = 9 pos
15 = 15 pos
25 = 25 pos
37 = 37 pos

HOUSING COLOR:
1 = BLACK
5 = WHITE
6 = BLUE

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
6	SCREW	STEEL	PALTING: Ni	
5	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
4	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
3	REAR SHELL	SPCC	PALTING: Sn	
2	FRONT SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER−PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER
A	2014/09/02	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECTS ▽: S.P.C

Toleance
x. ±0.50
.x ±0.30
.xx ±0.25

NAME:	D-SUB FEMALE 180度后铆6.0鱼叉前锁5.0mm螺母(客户用图)				PART NO.	B05−0XX8X1AD−E5	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2014/09/02	JINGLI	KING ZHOU		B05−091

东莞市箐国电子有限公司